

Figure 1

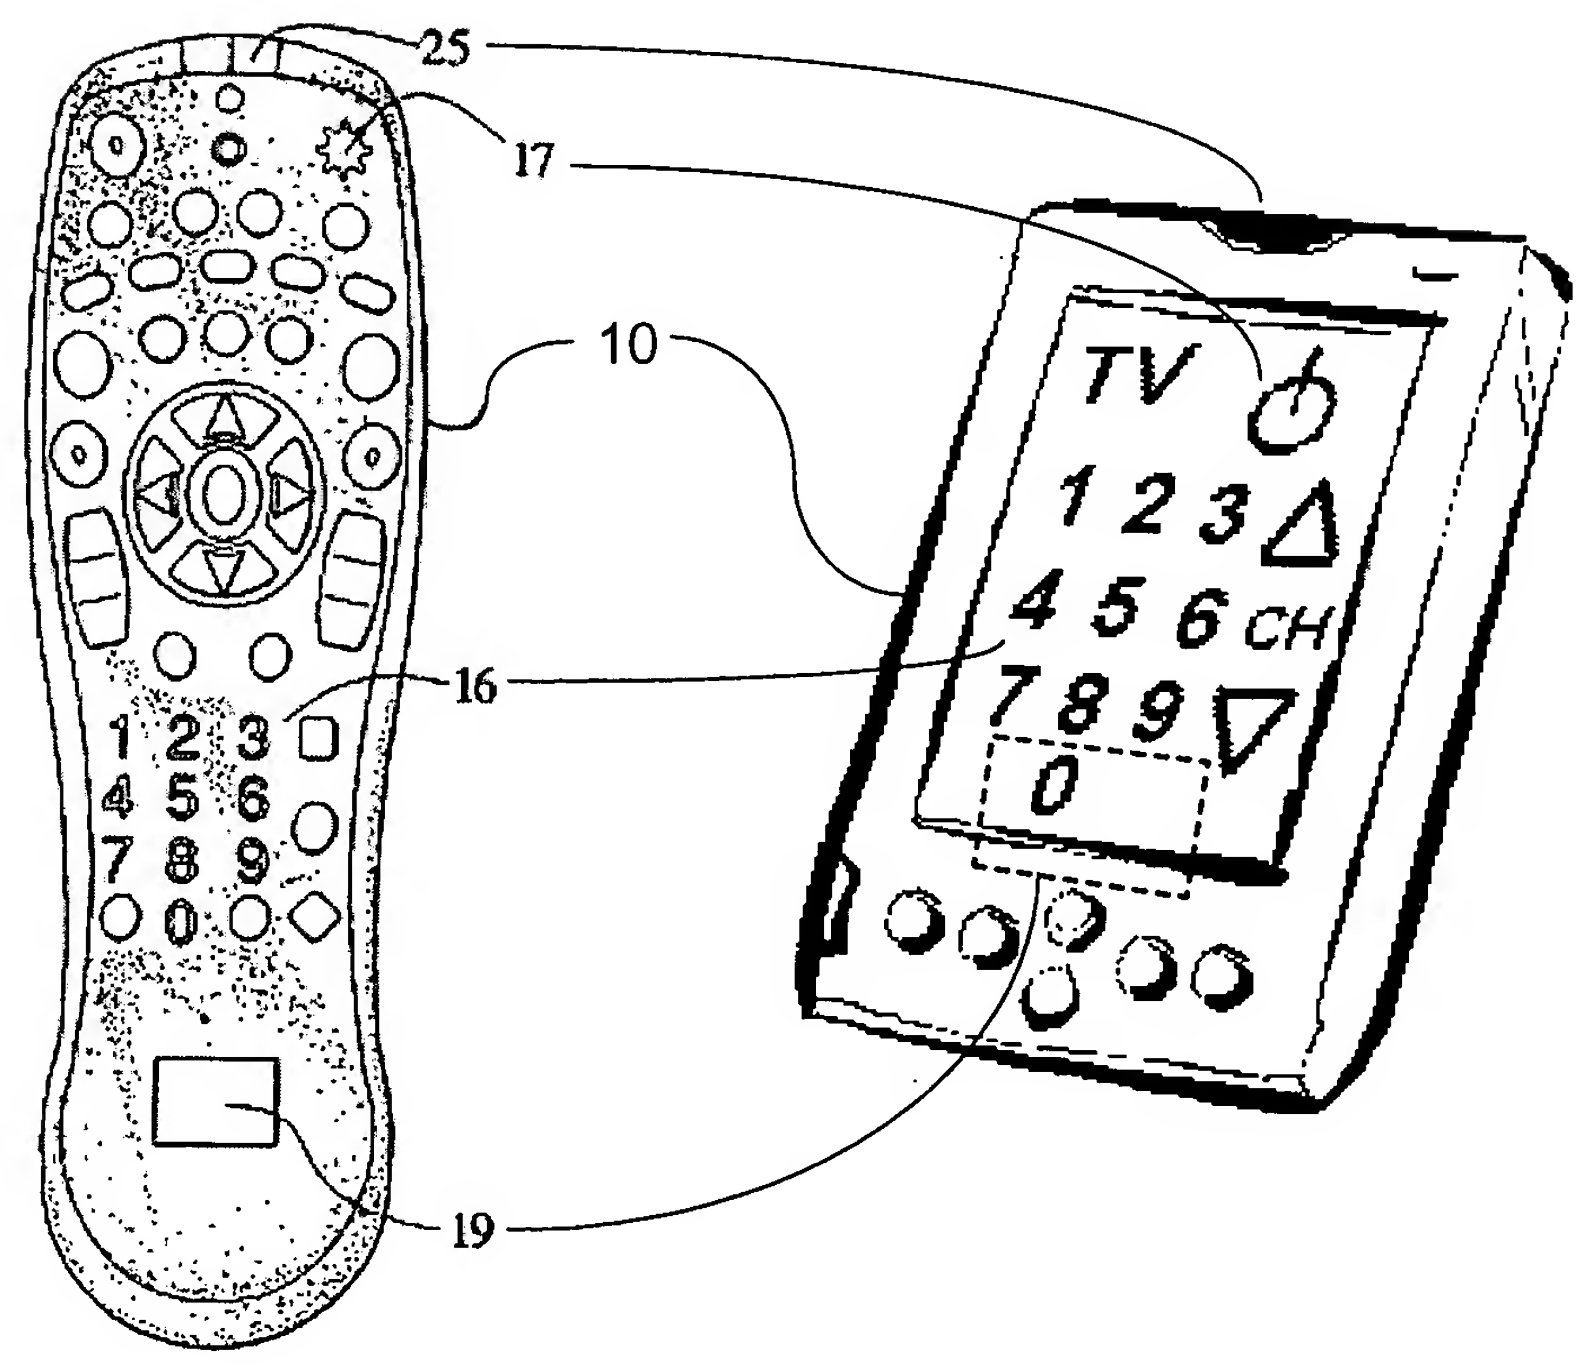


Figure 2

INITIAL POWER APPLICATION PROCESS

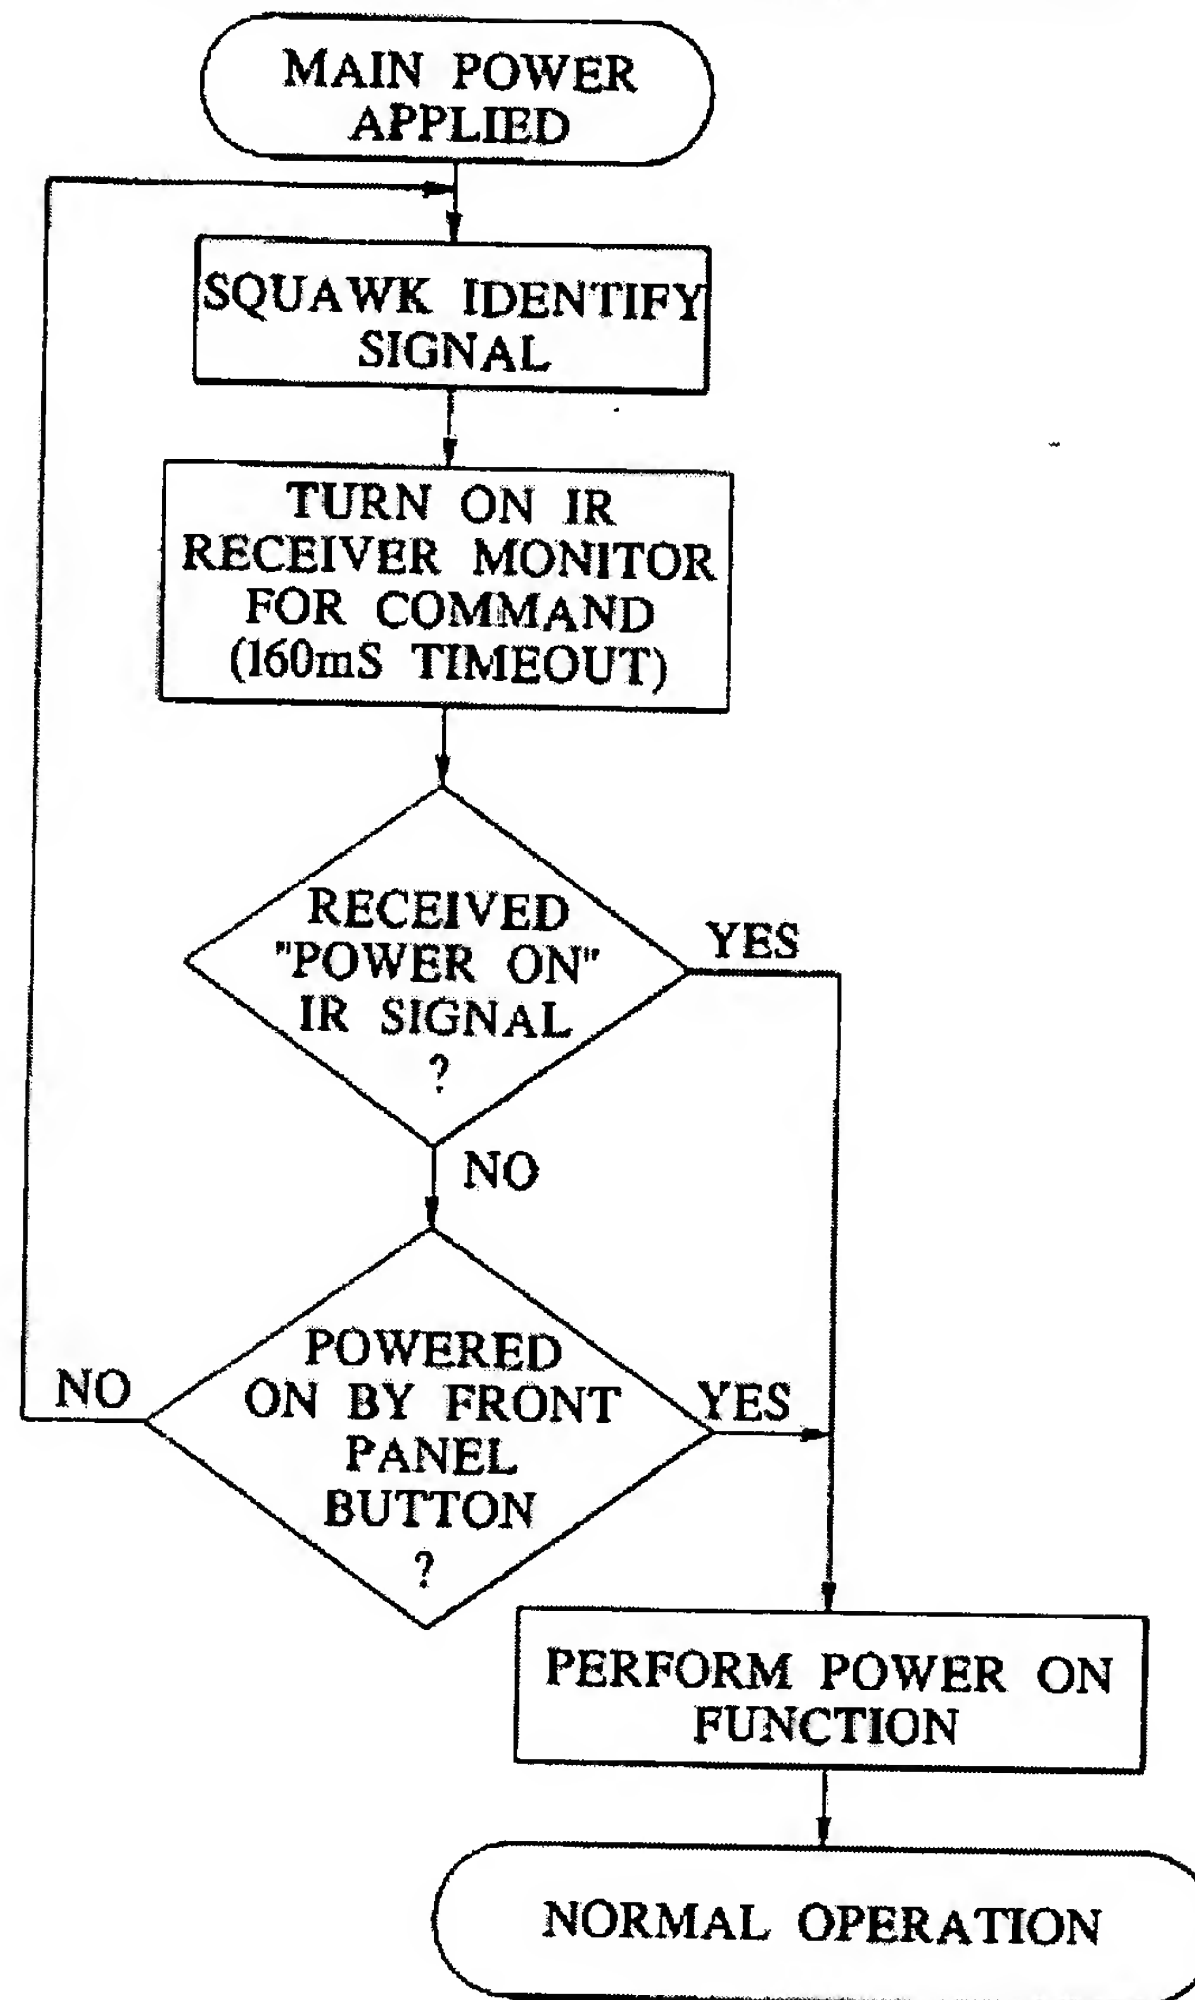


Figure 3

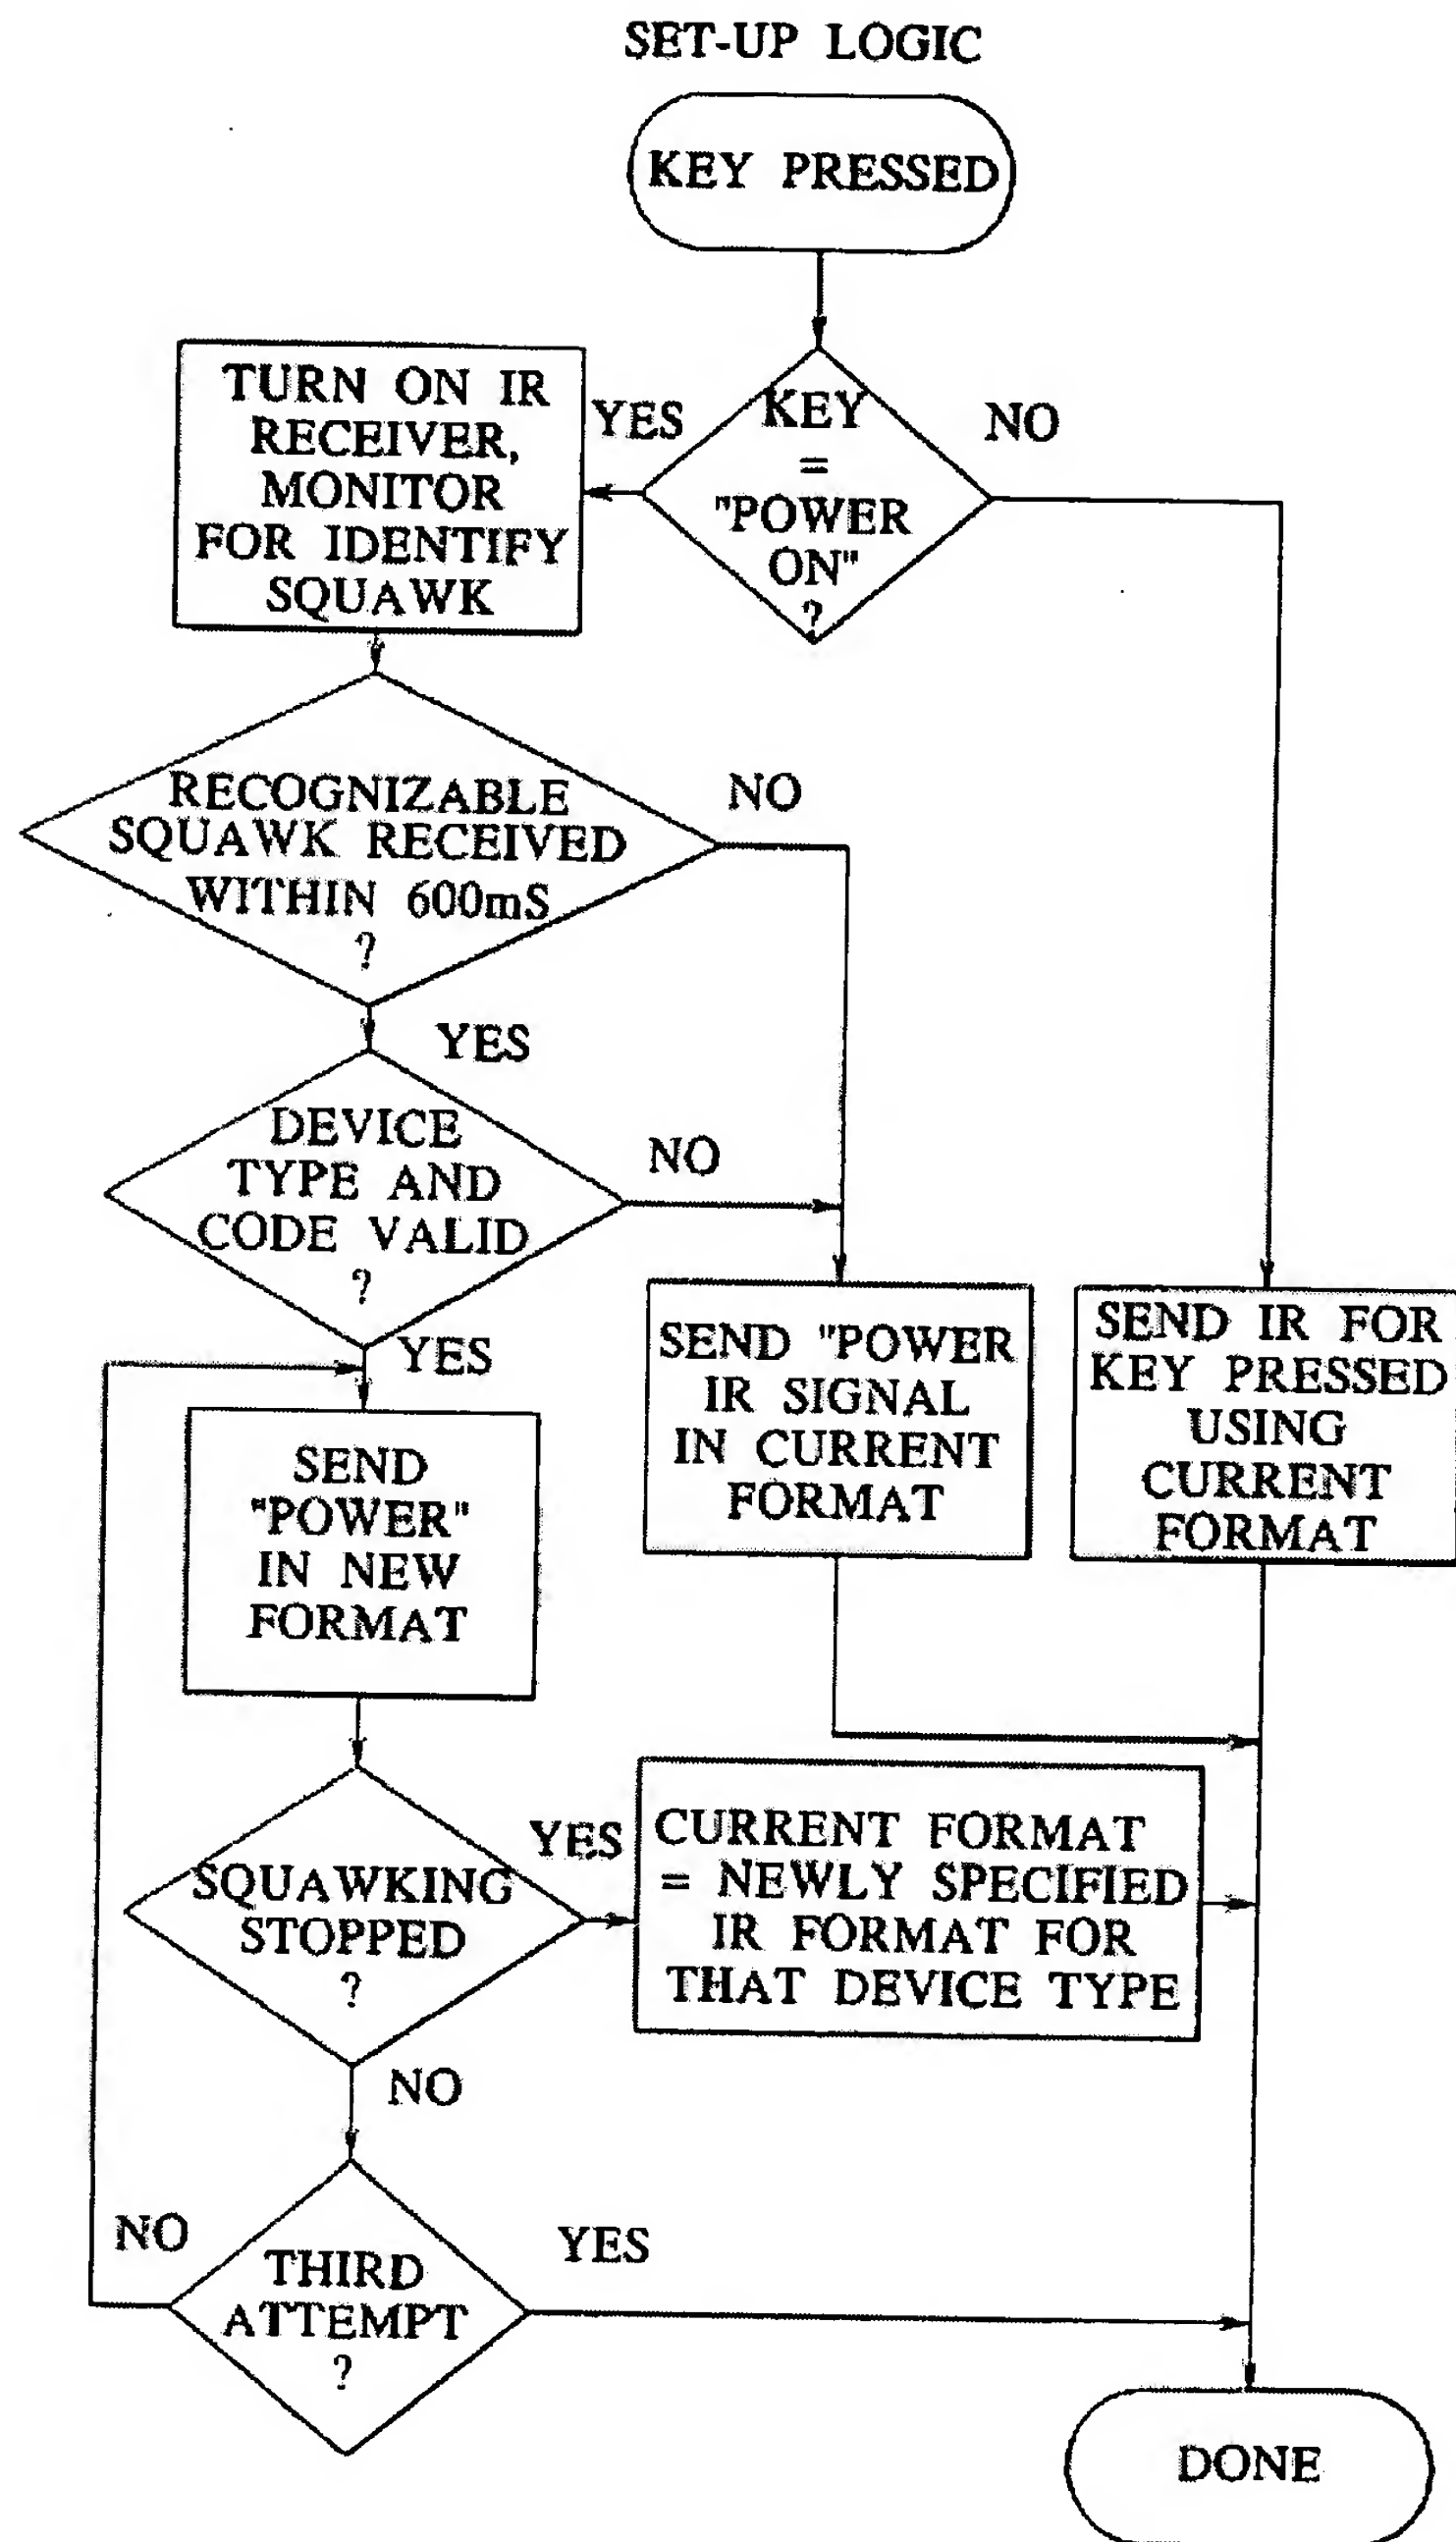


Figure 4

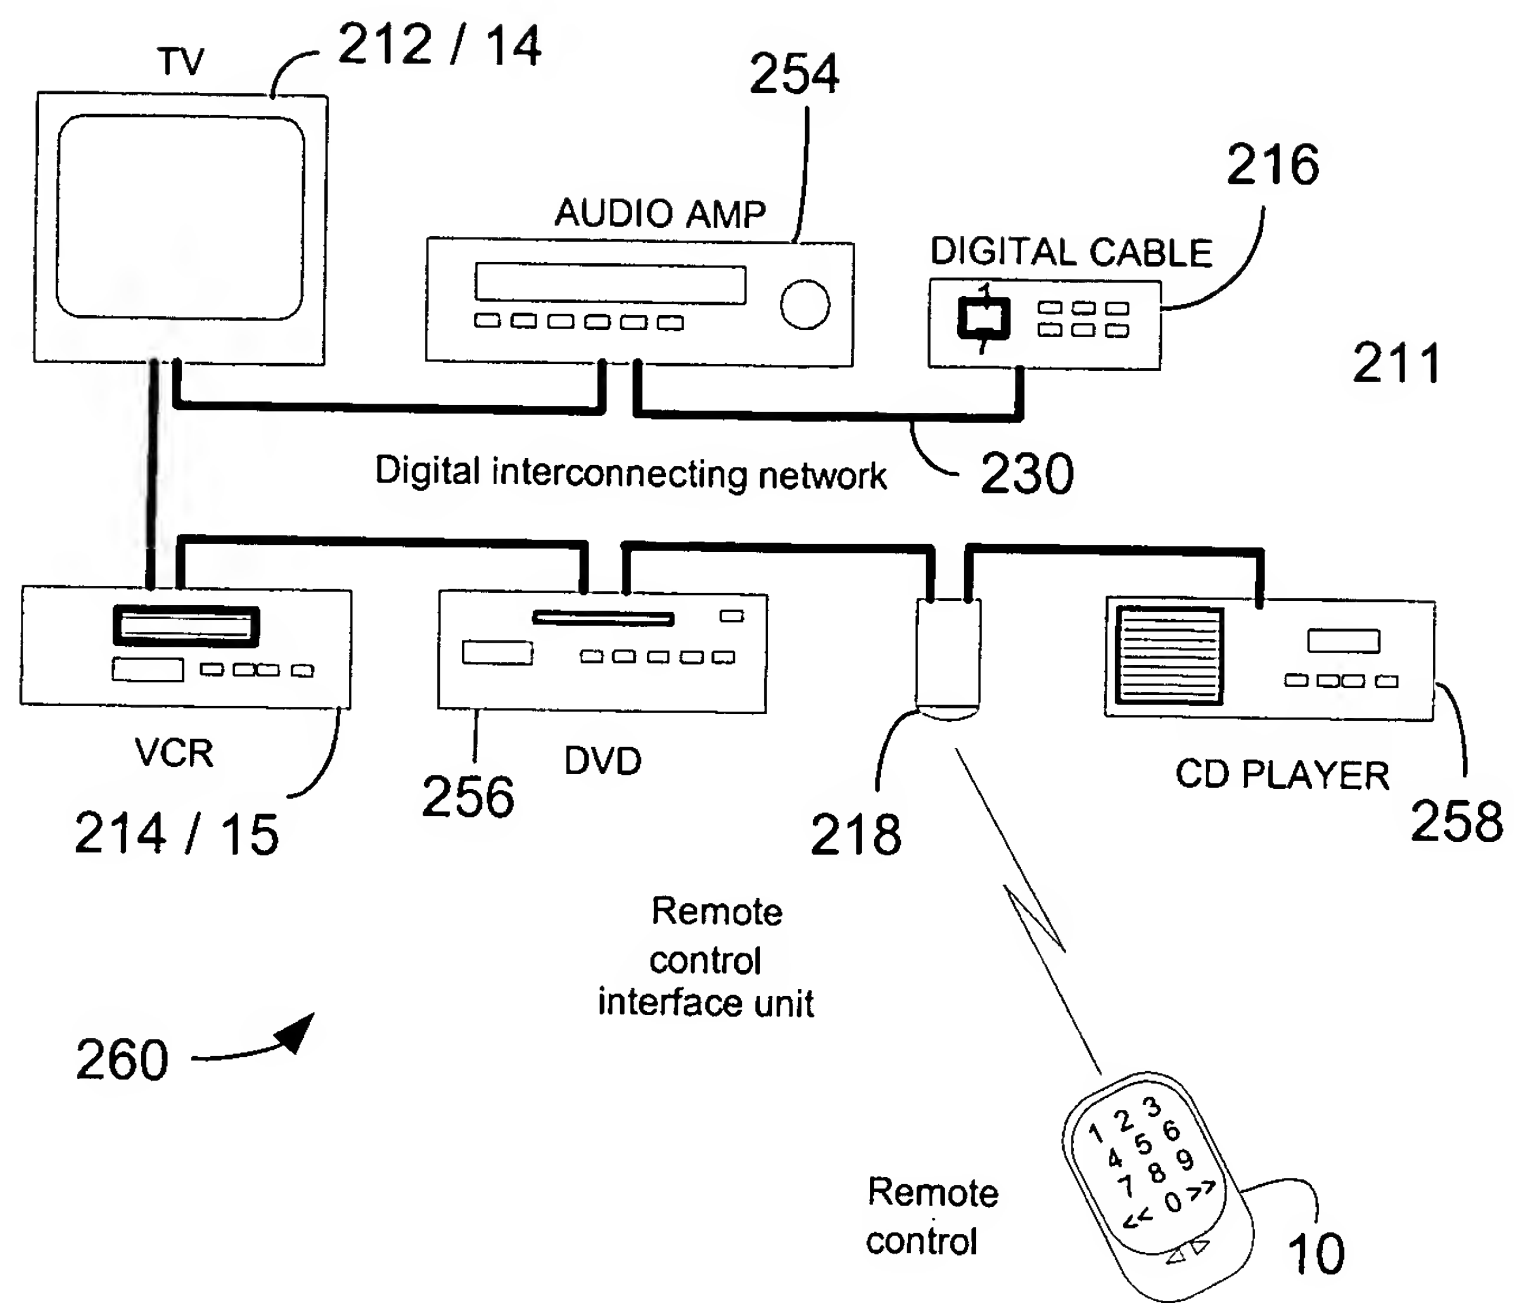


Figure 5

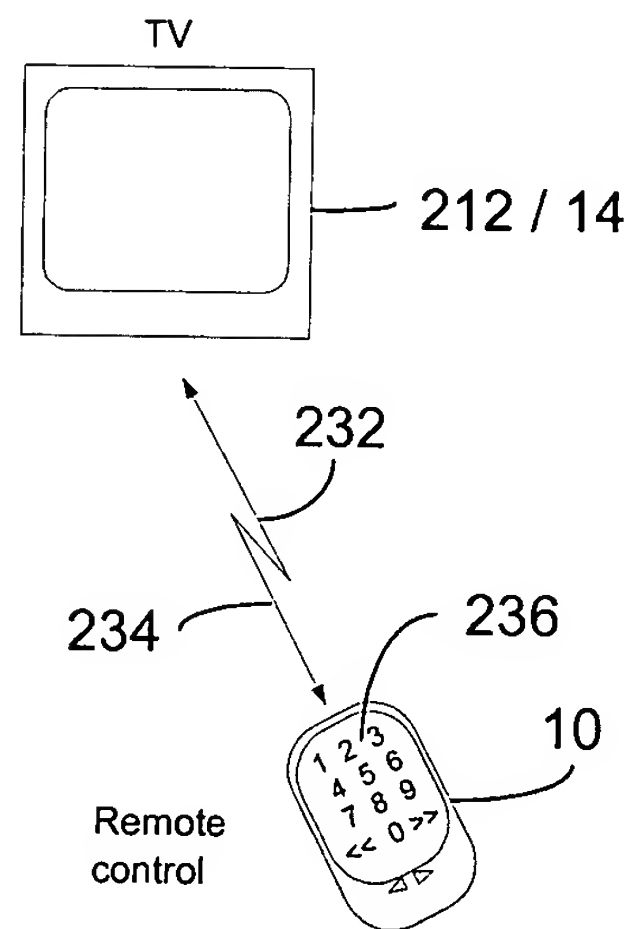


Figure 6

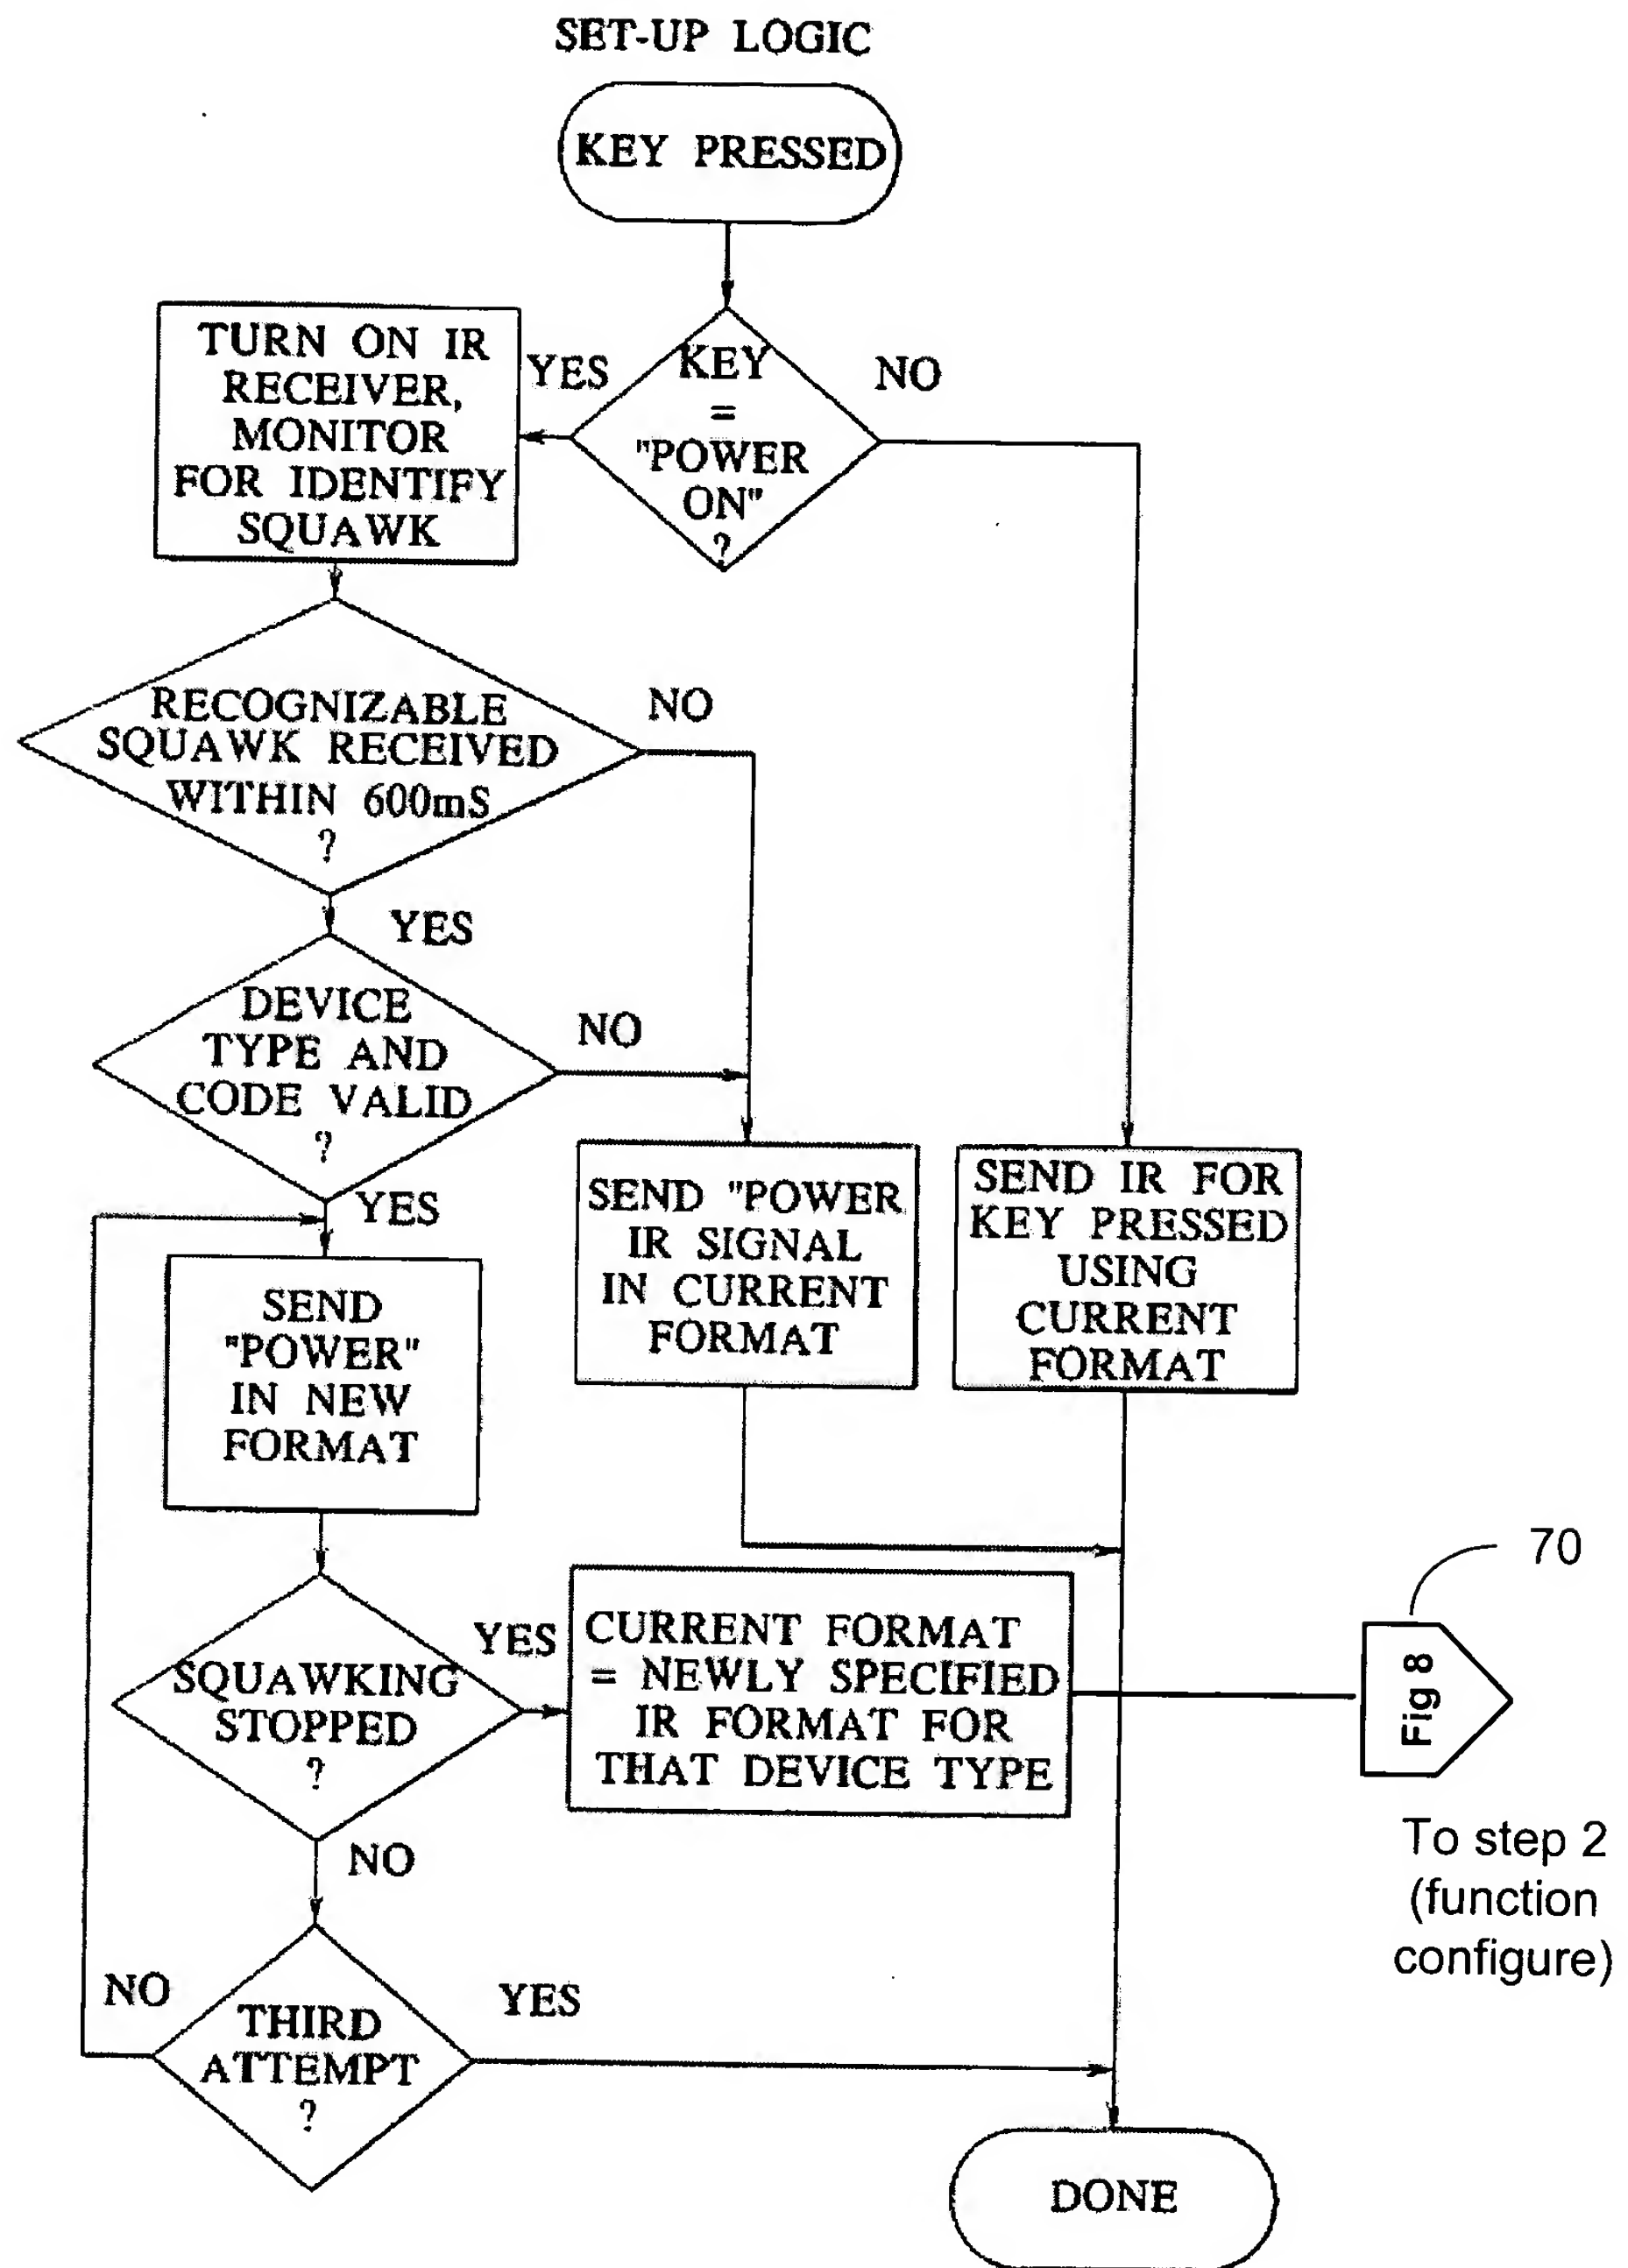


Figure 7

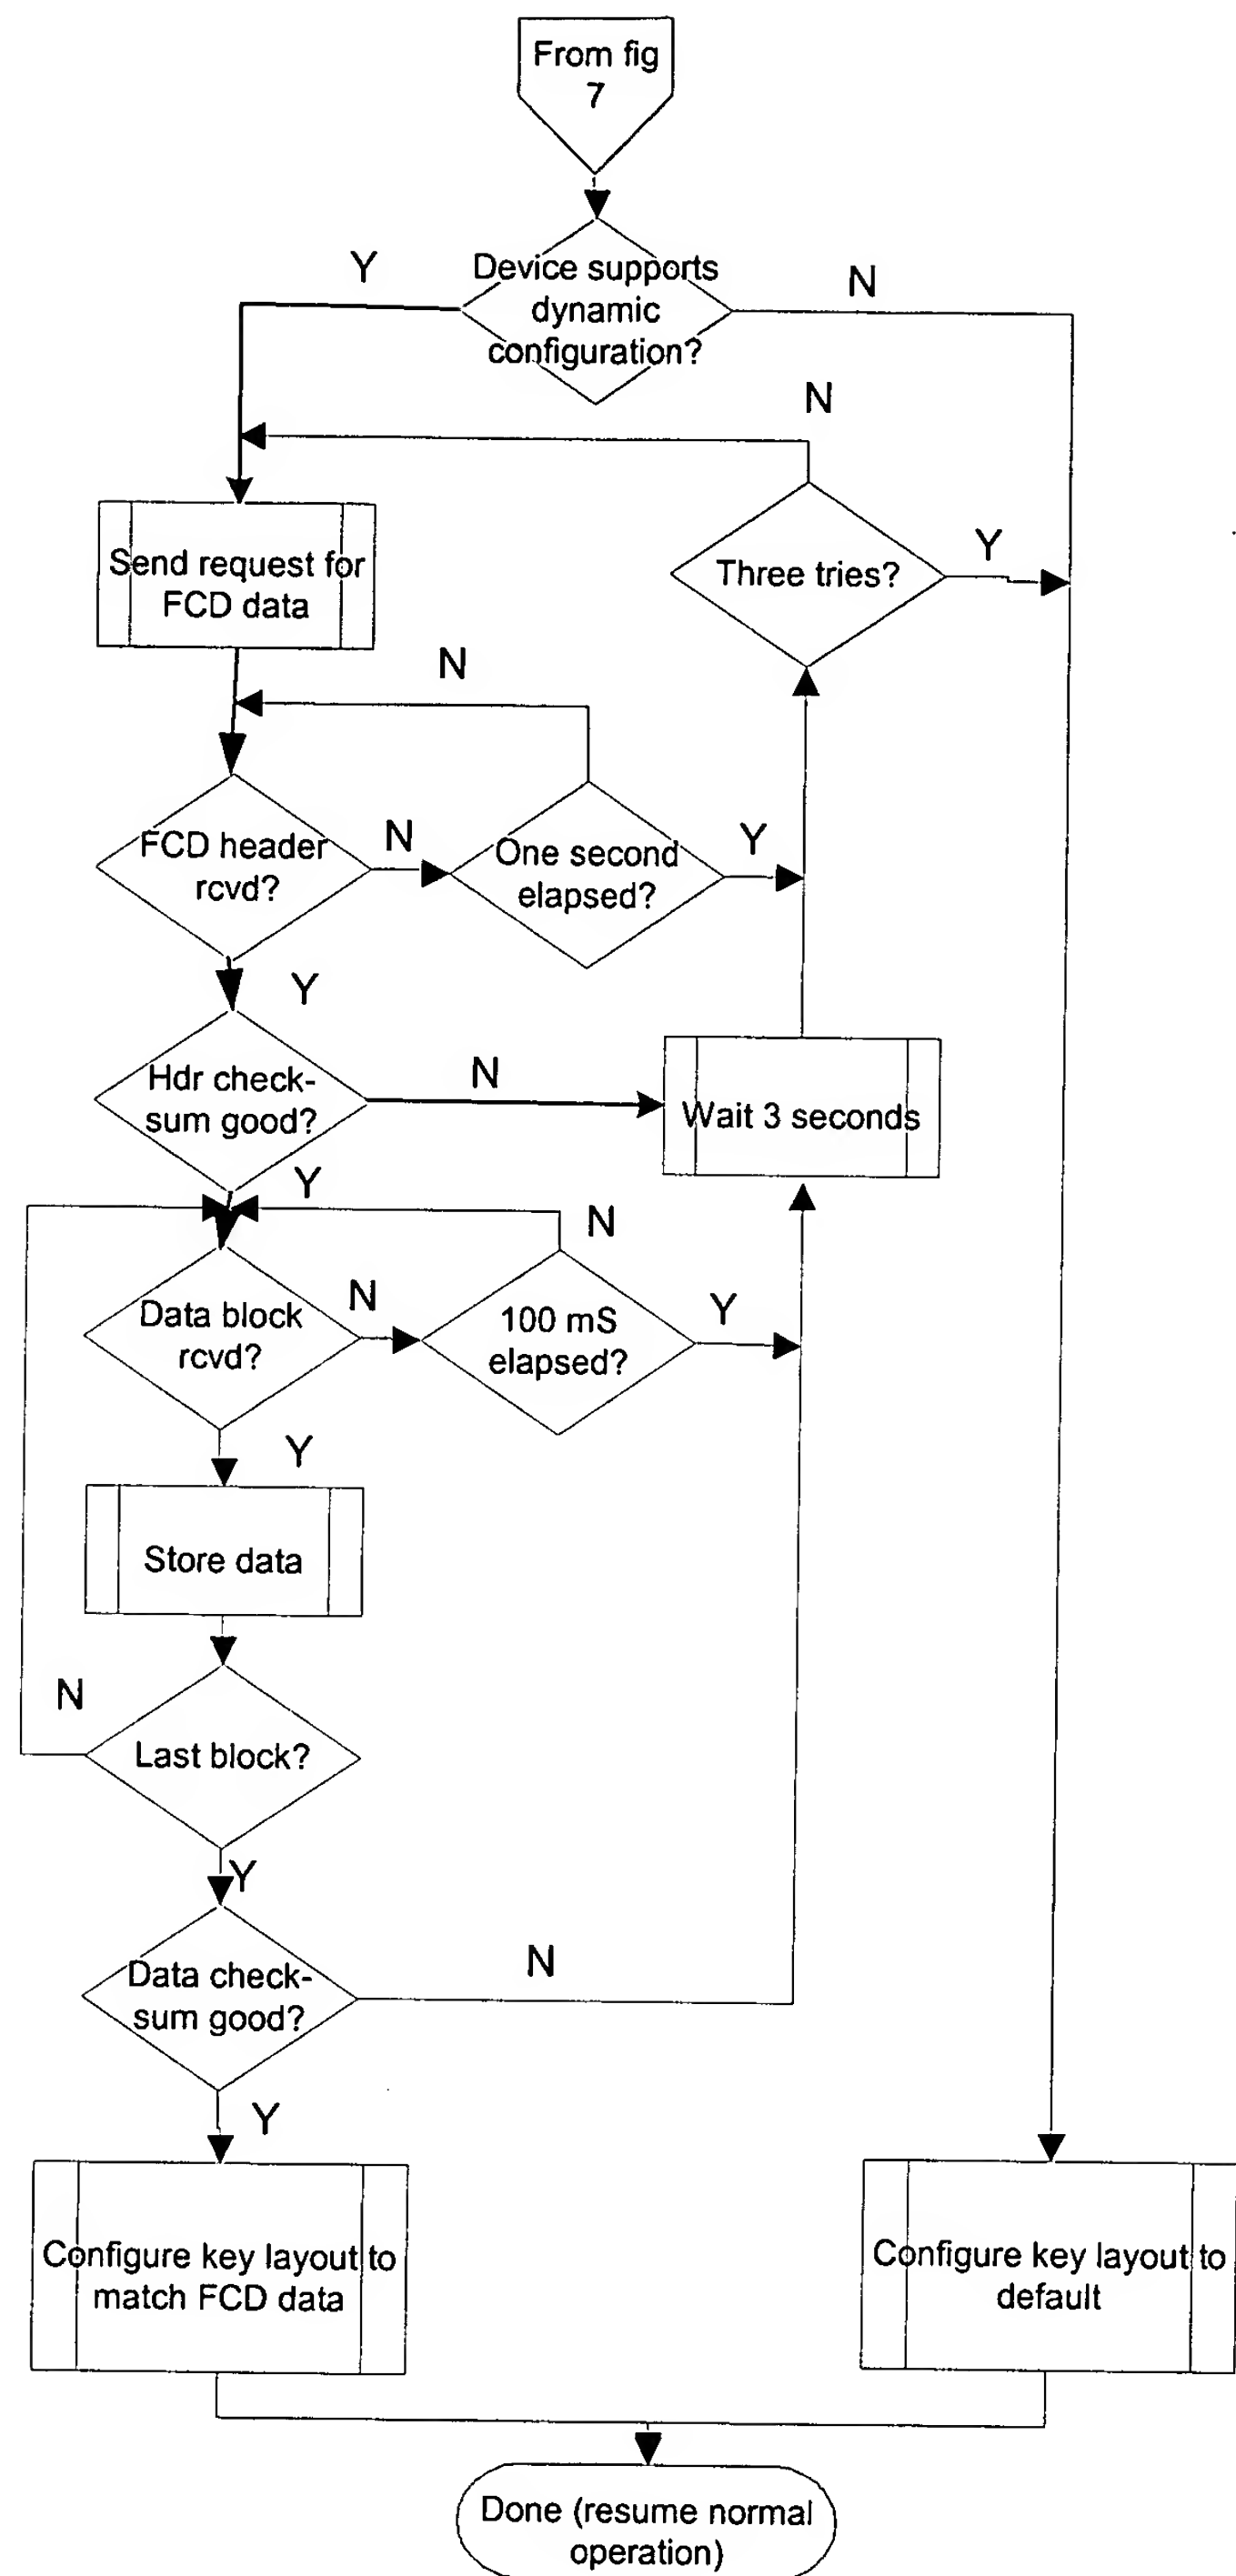


Figure 8

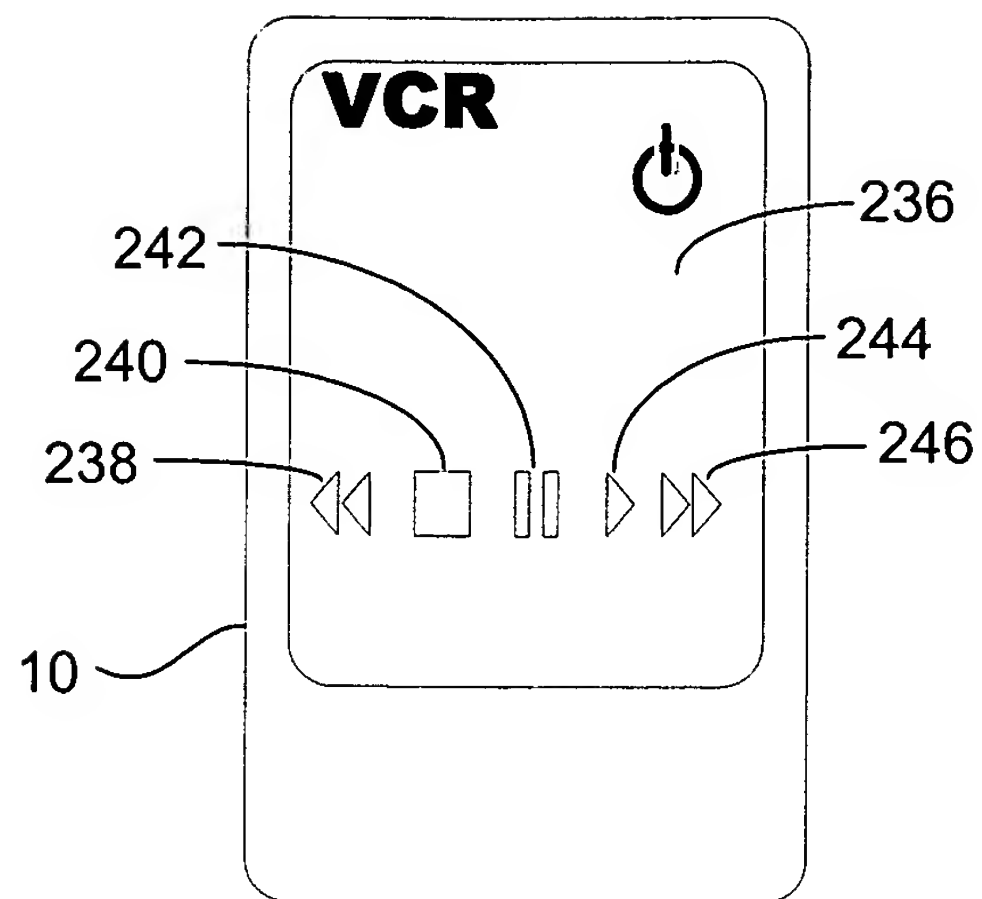


Figure 9a

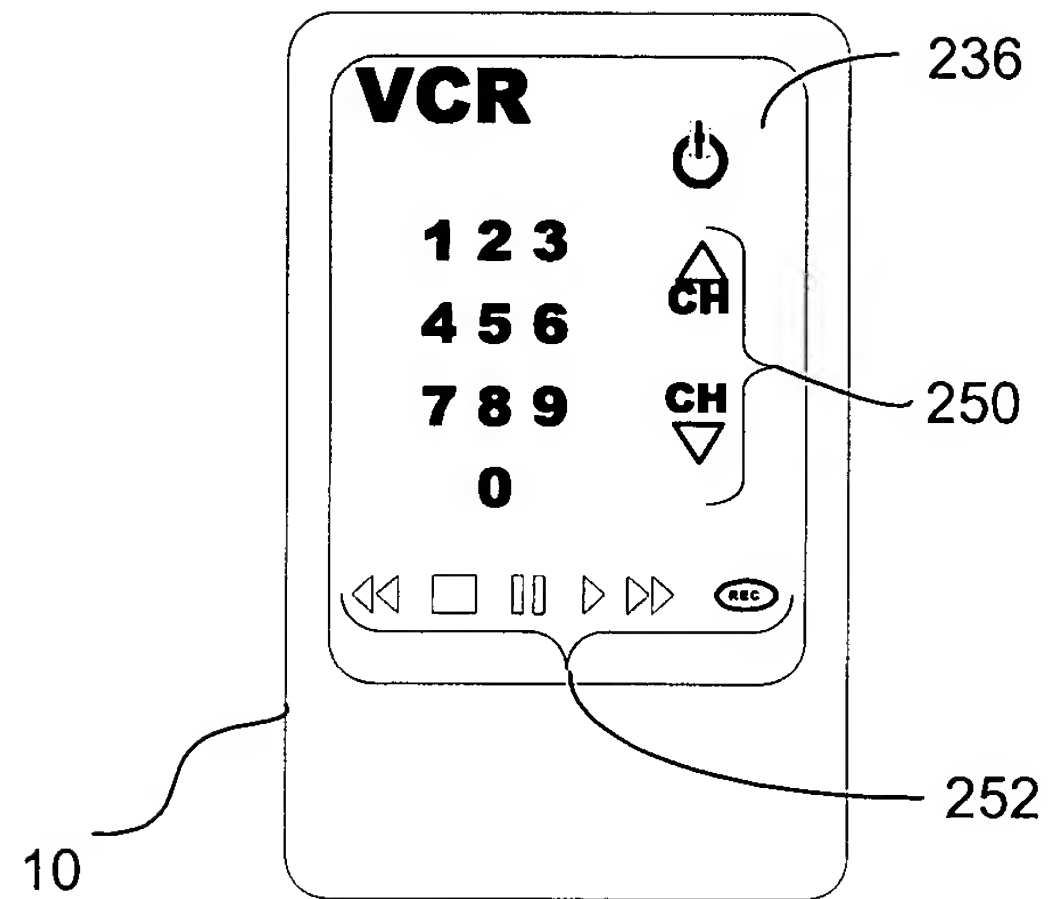


Figure 9b

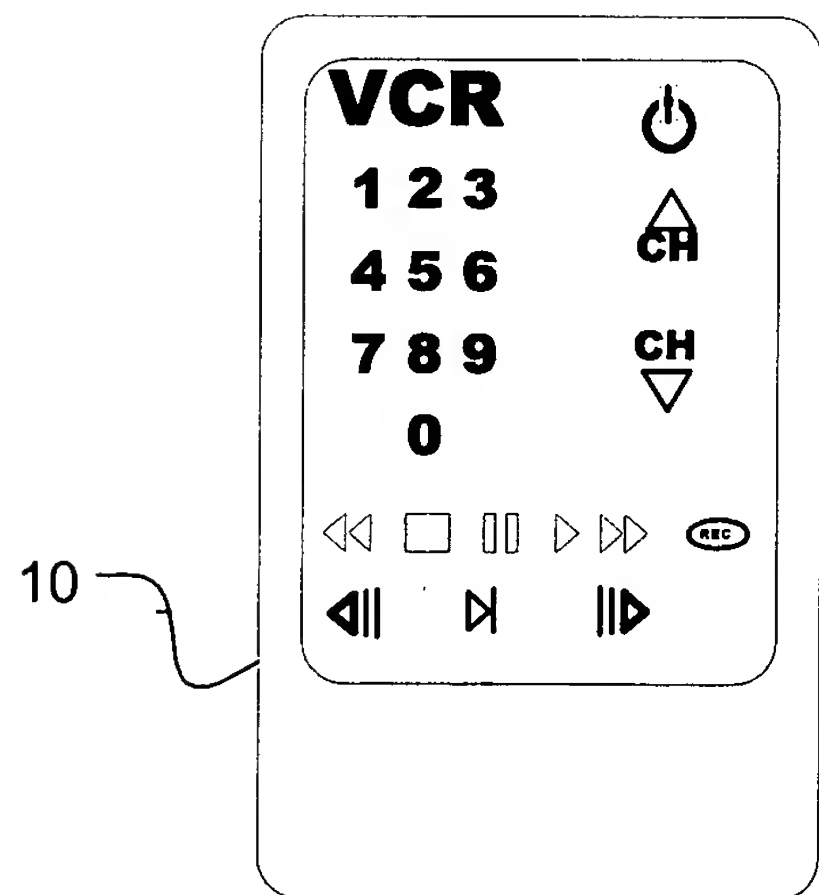


Figure 9c

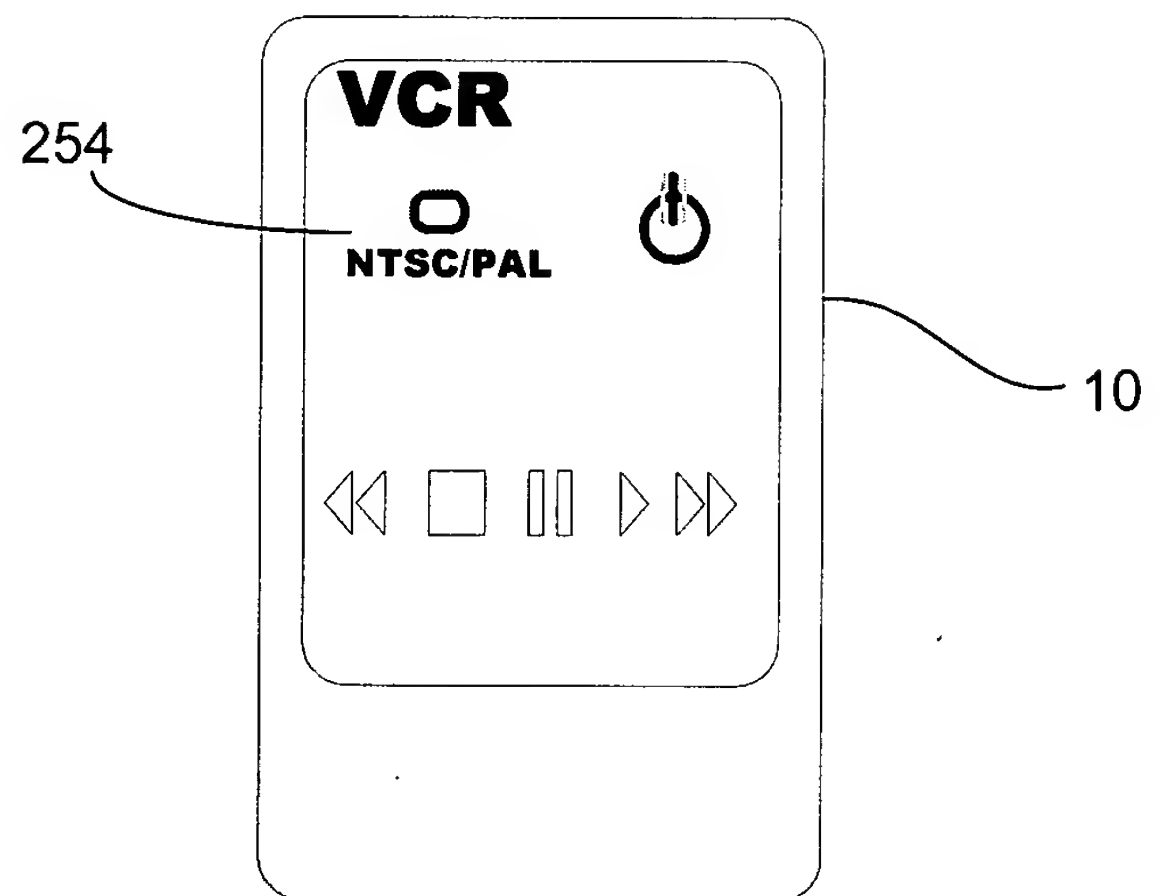


Figure 9d

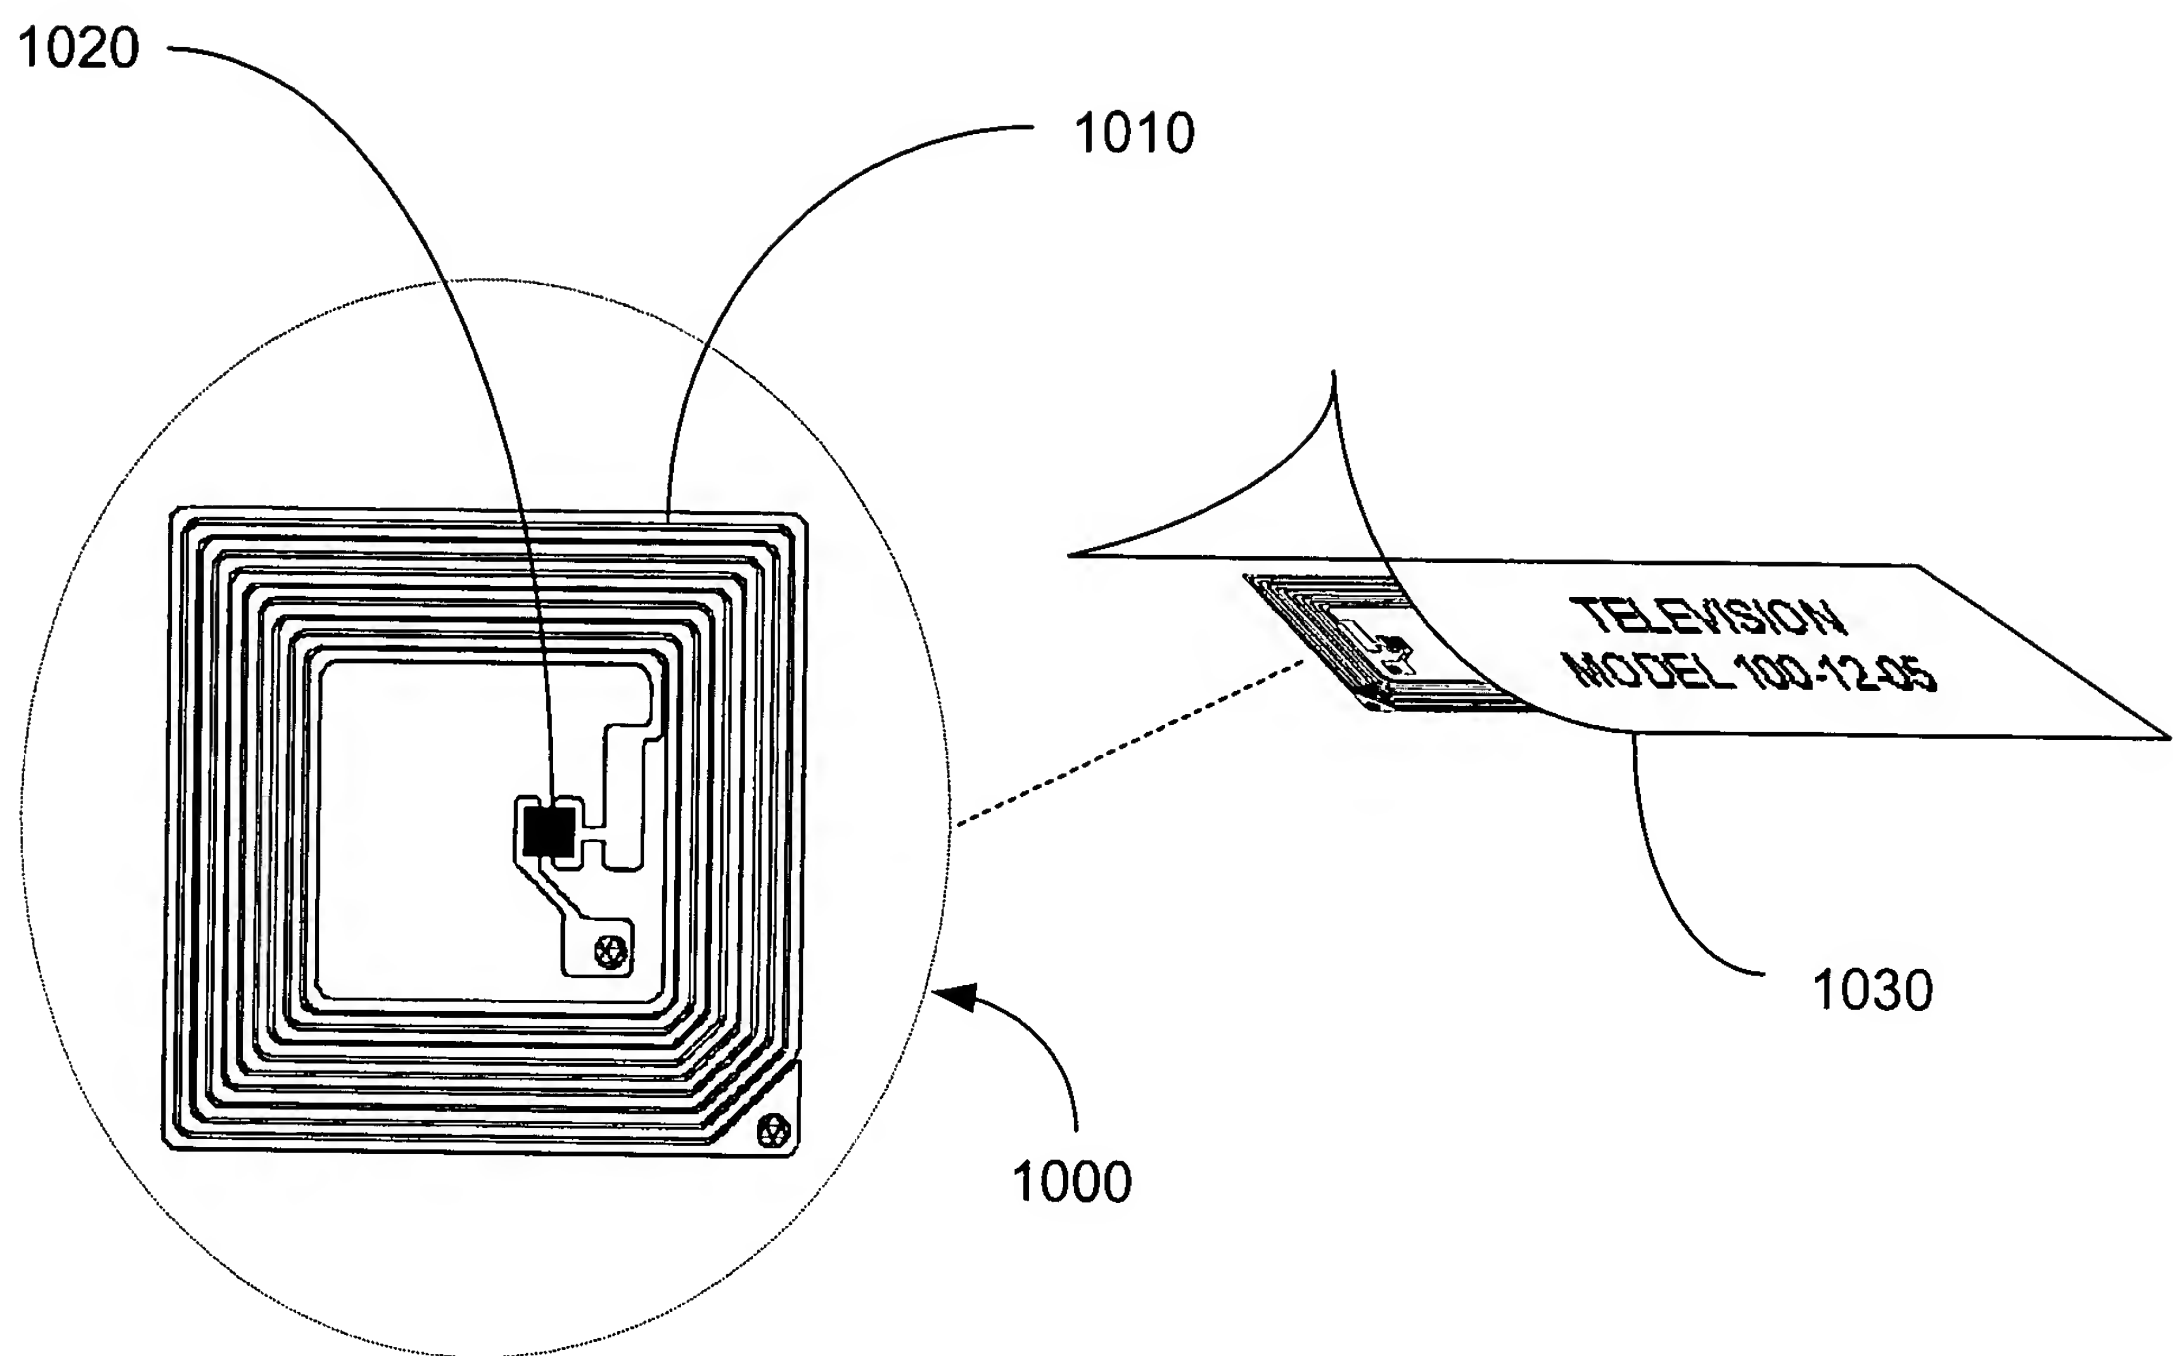


Figure 10a

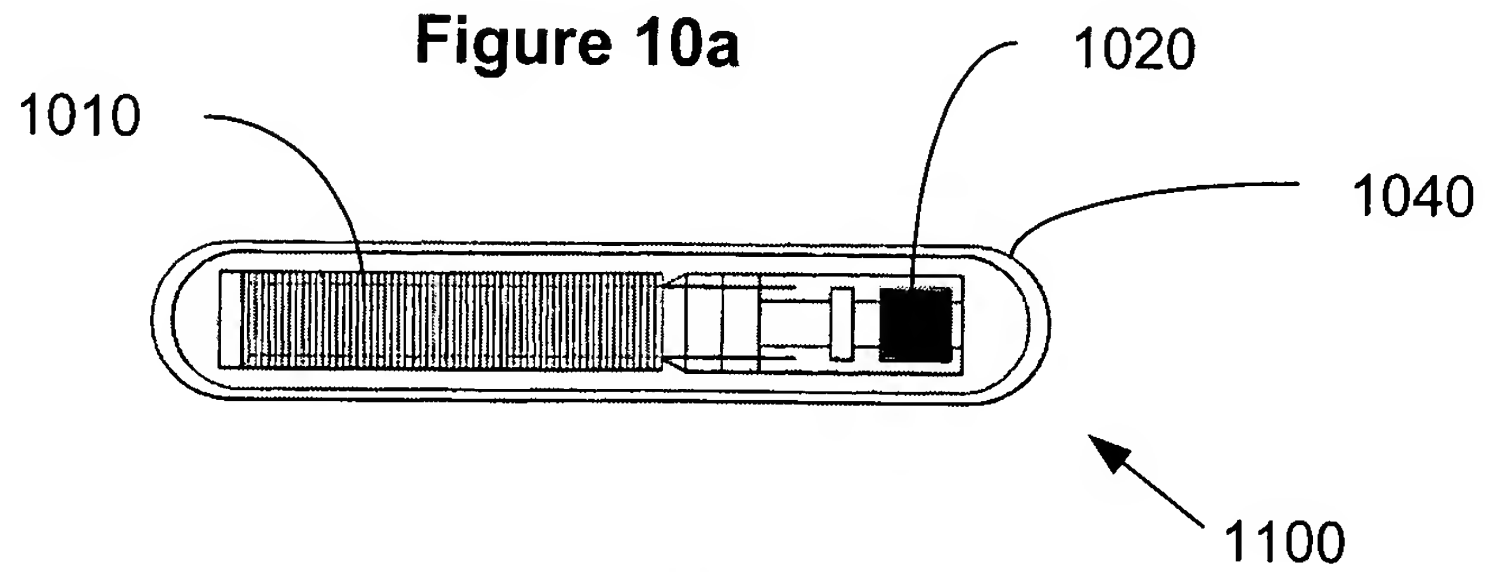


Figure 10b

ELECTRONIC PRODUCT CODE TYPE I			
01.0000A89.00016F.000169D<0			
Header 8-bits	EPC Manager 28-bits	Object Class 24-bits	Serial Number 36-bits

Figure 11

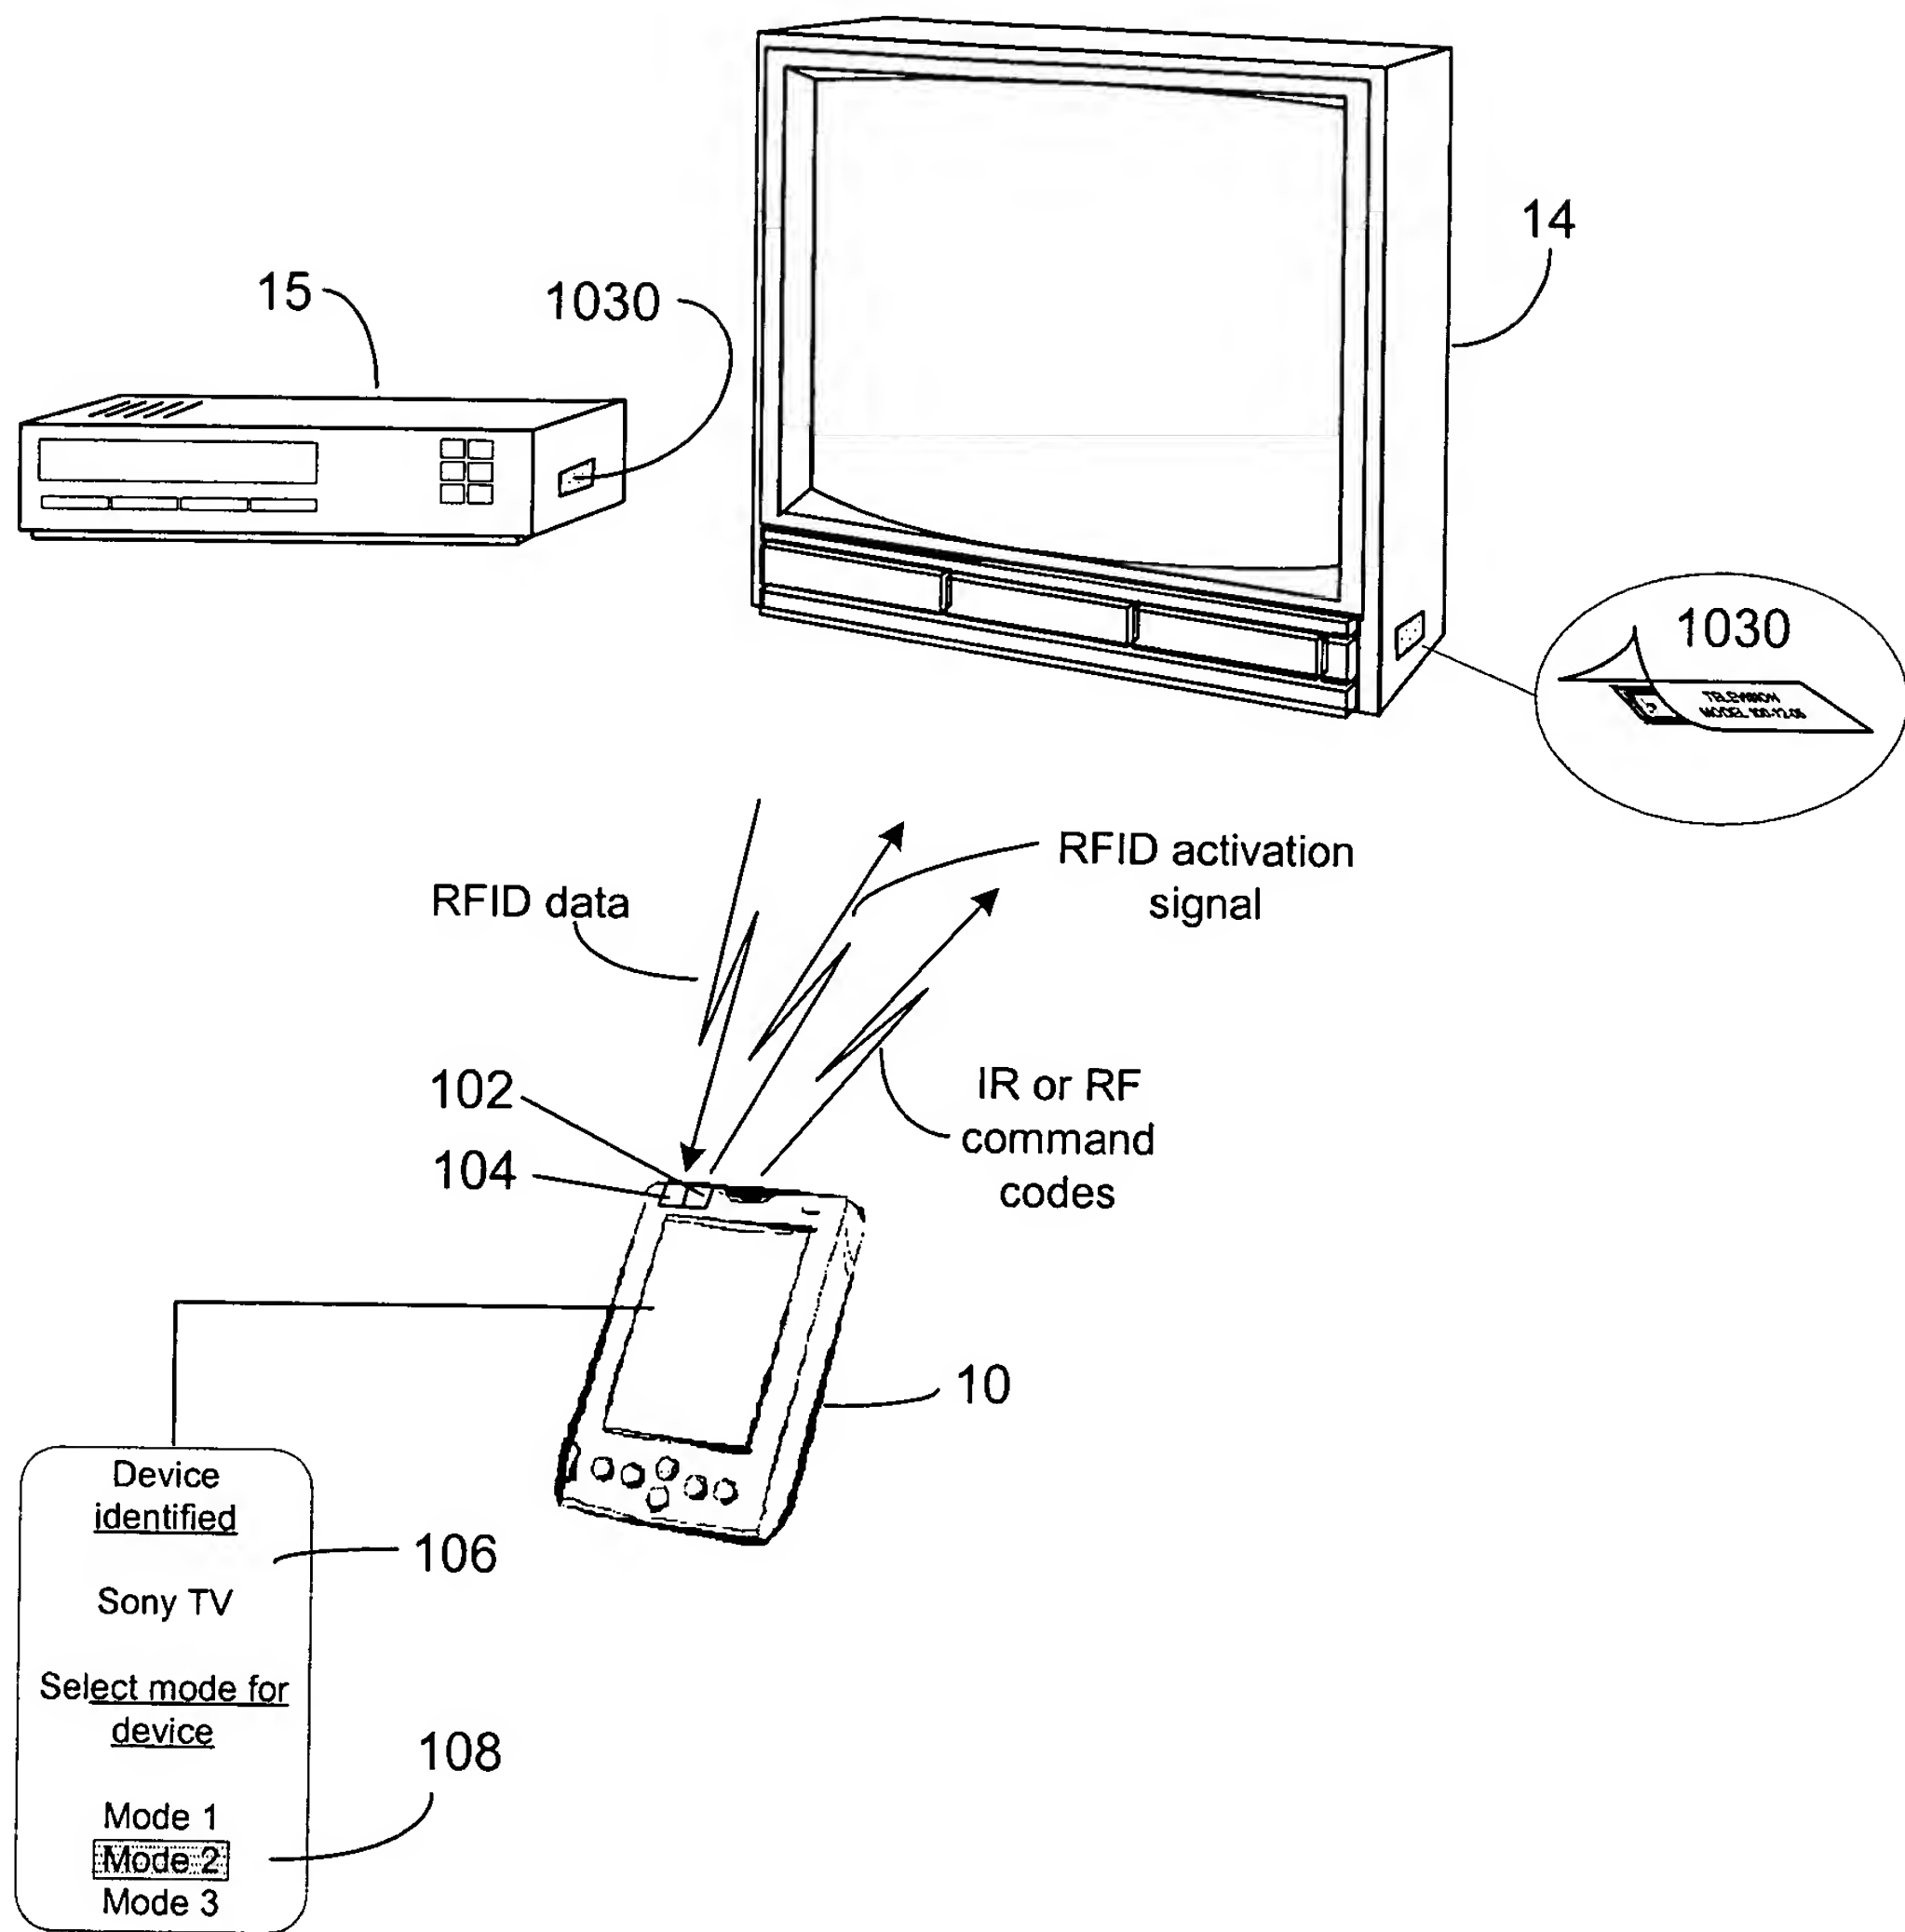


Figure 12

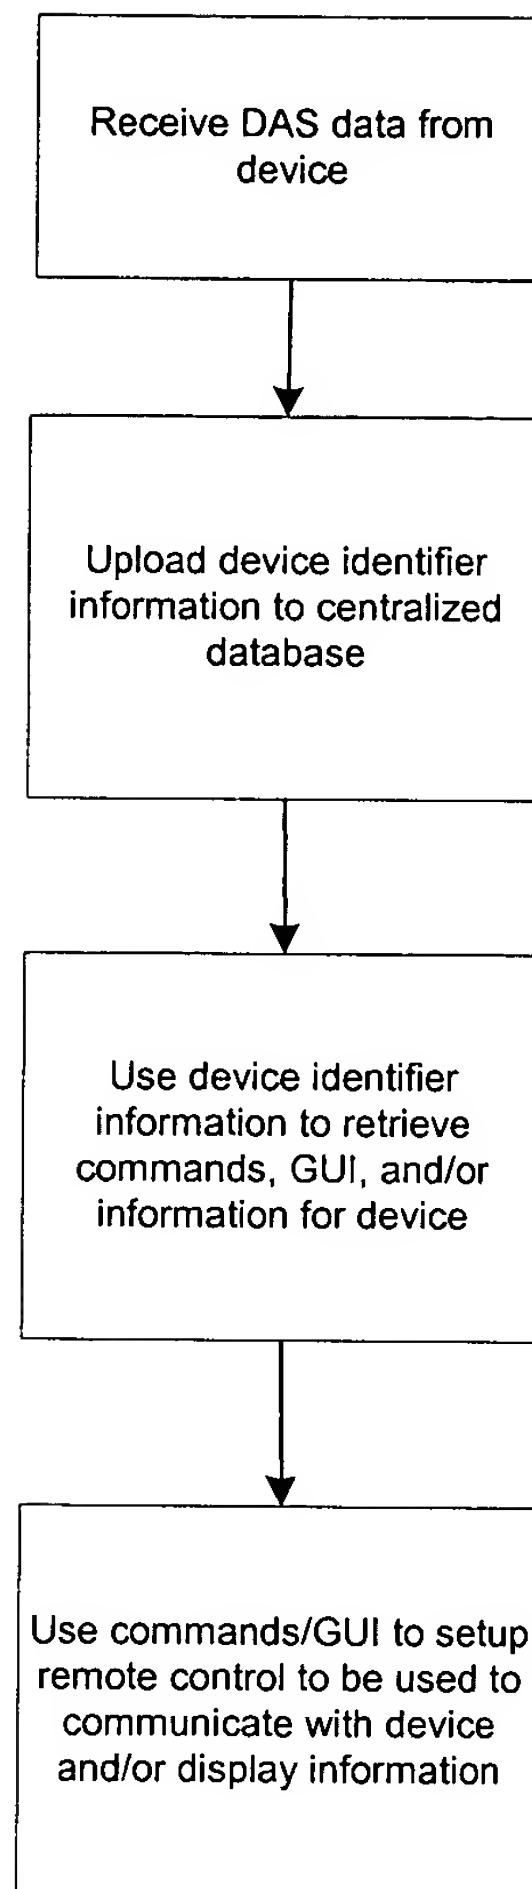


Figure 13

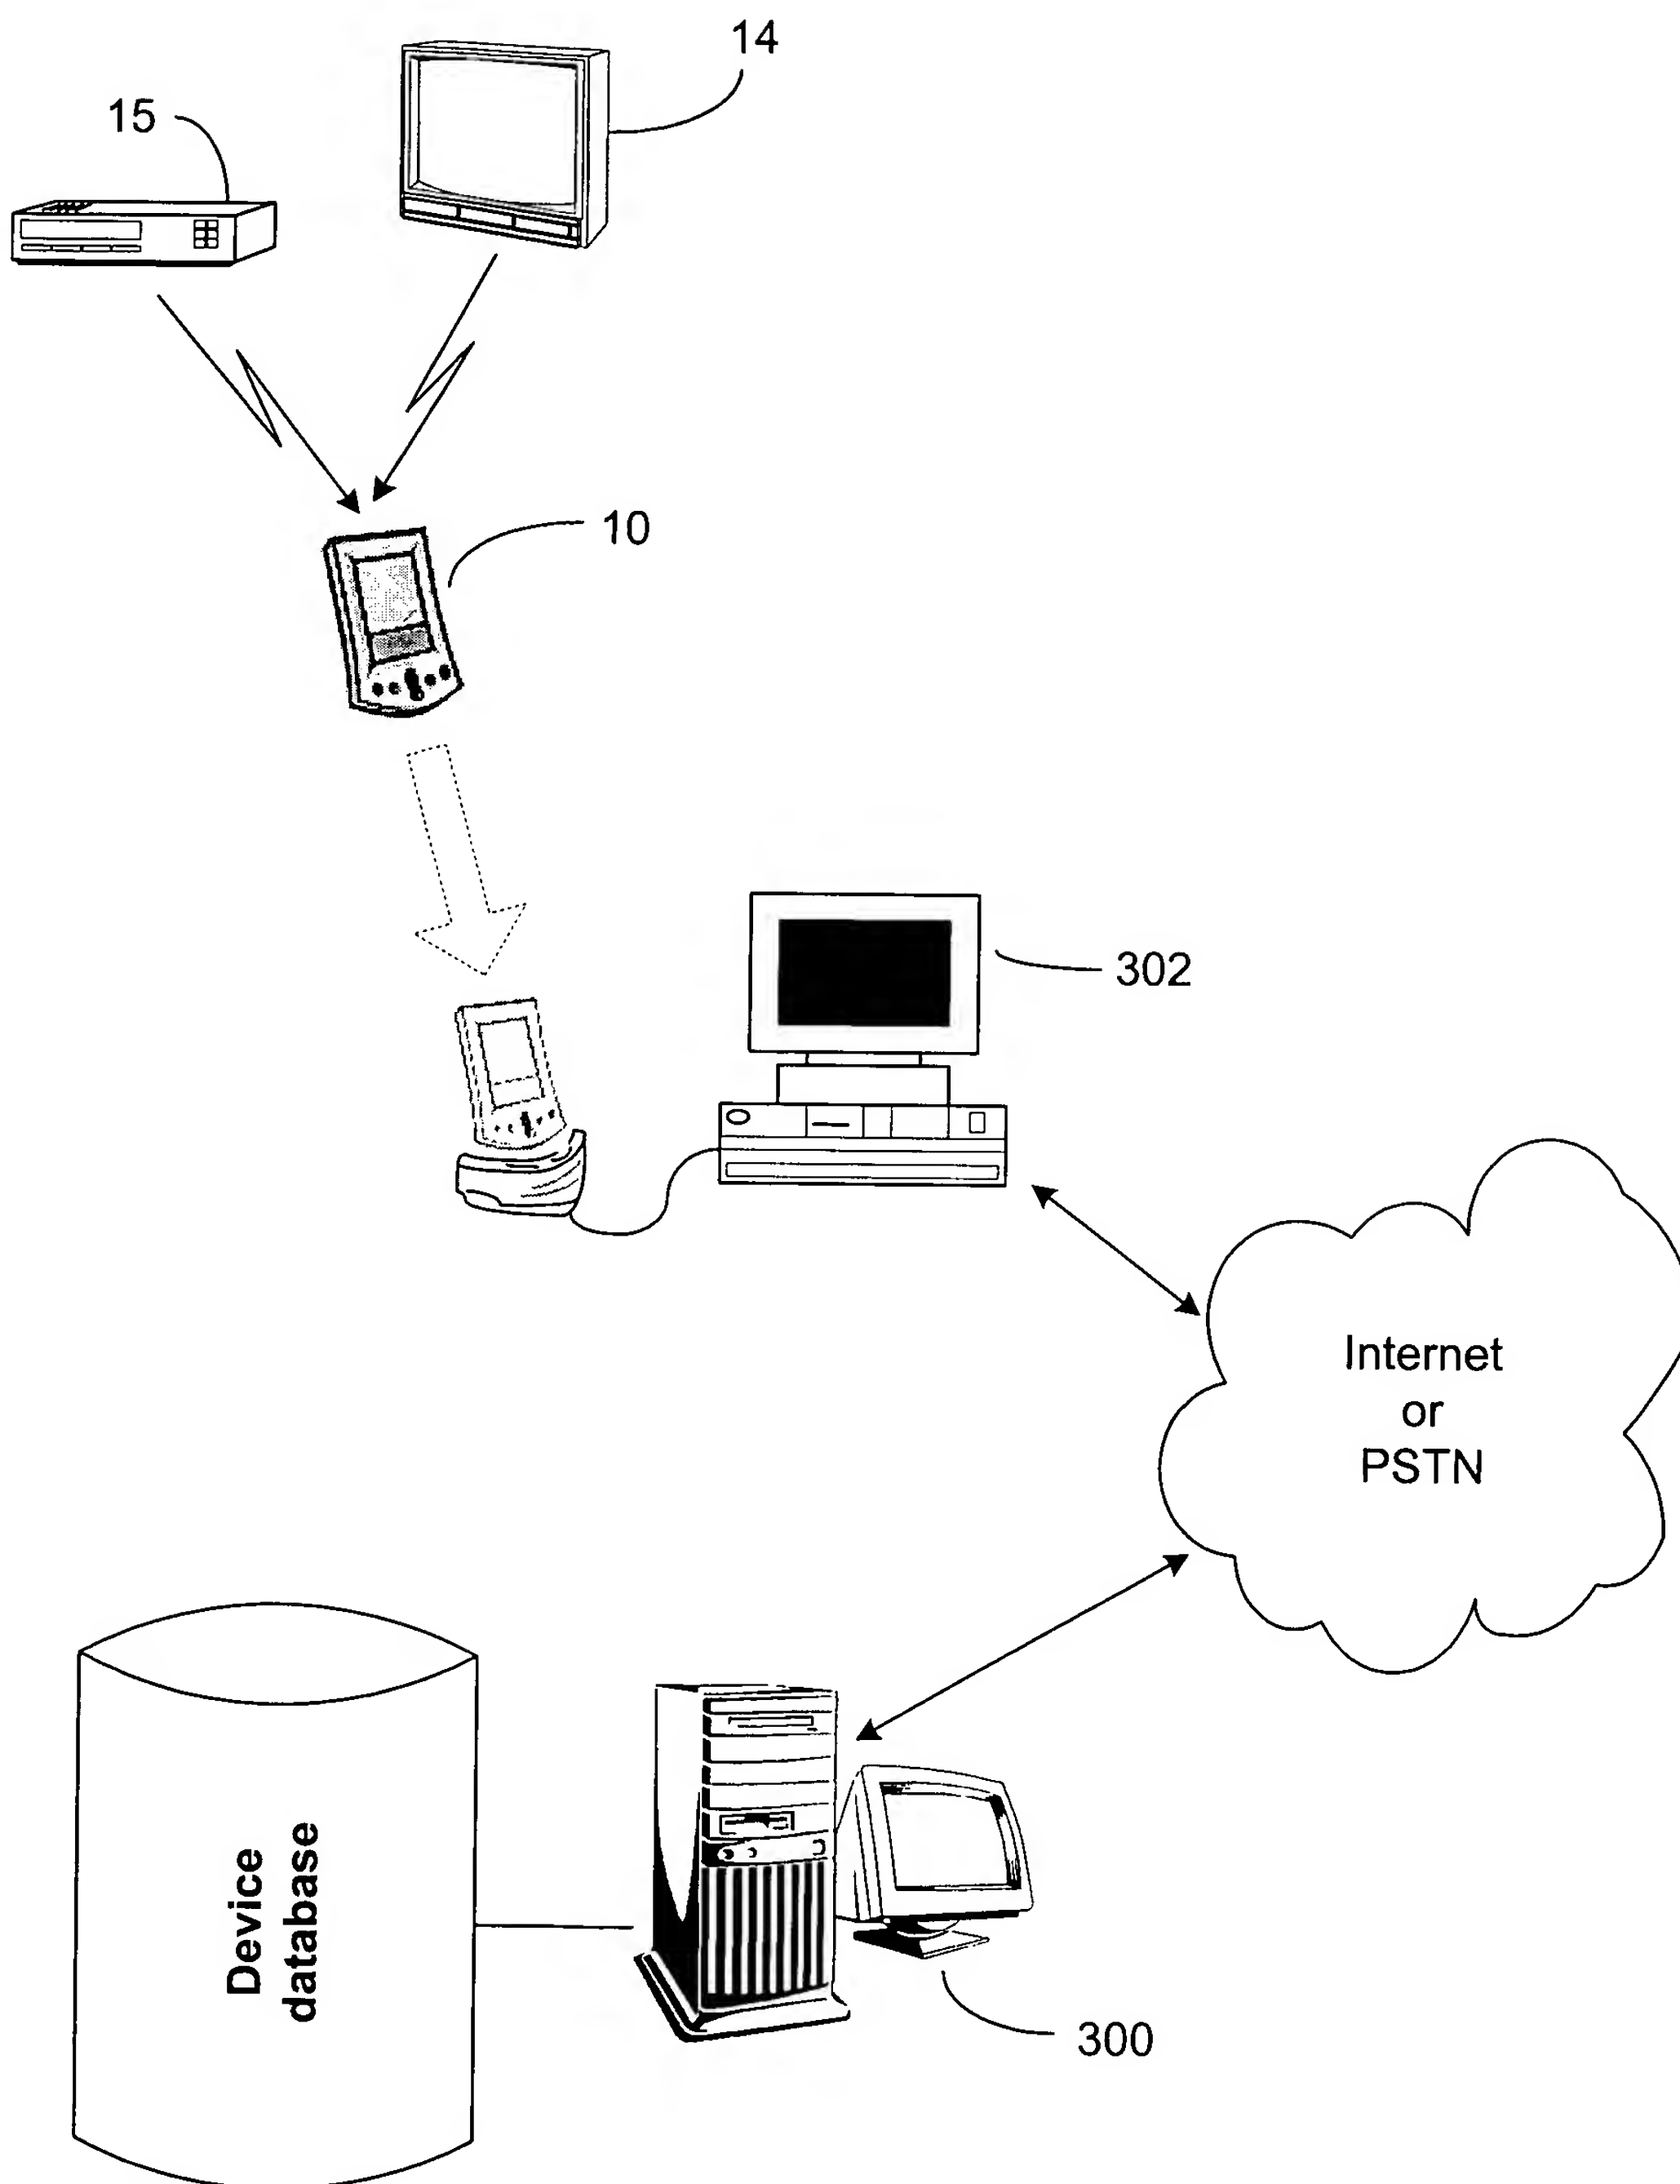


Figure 14

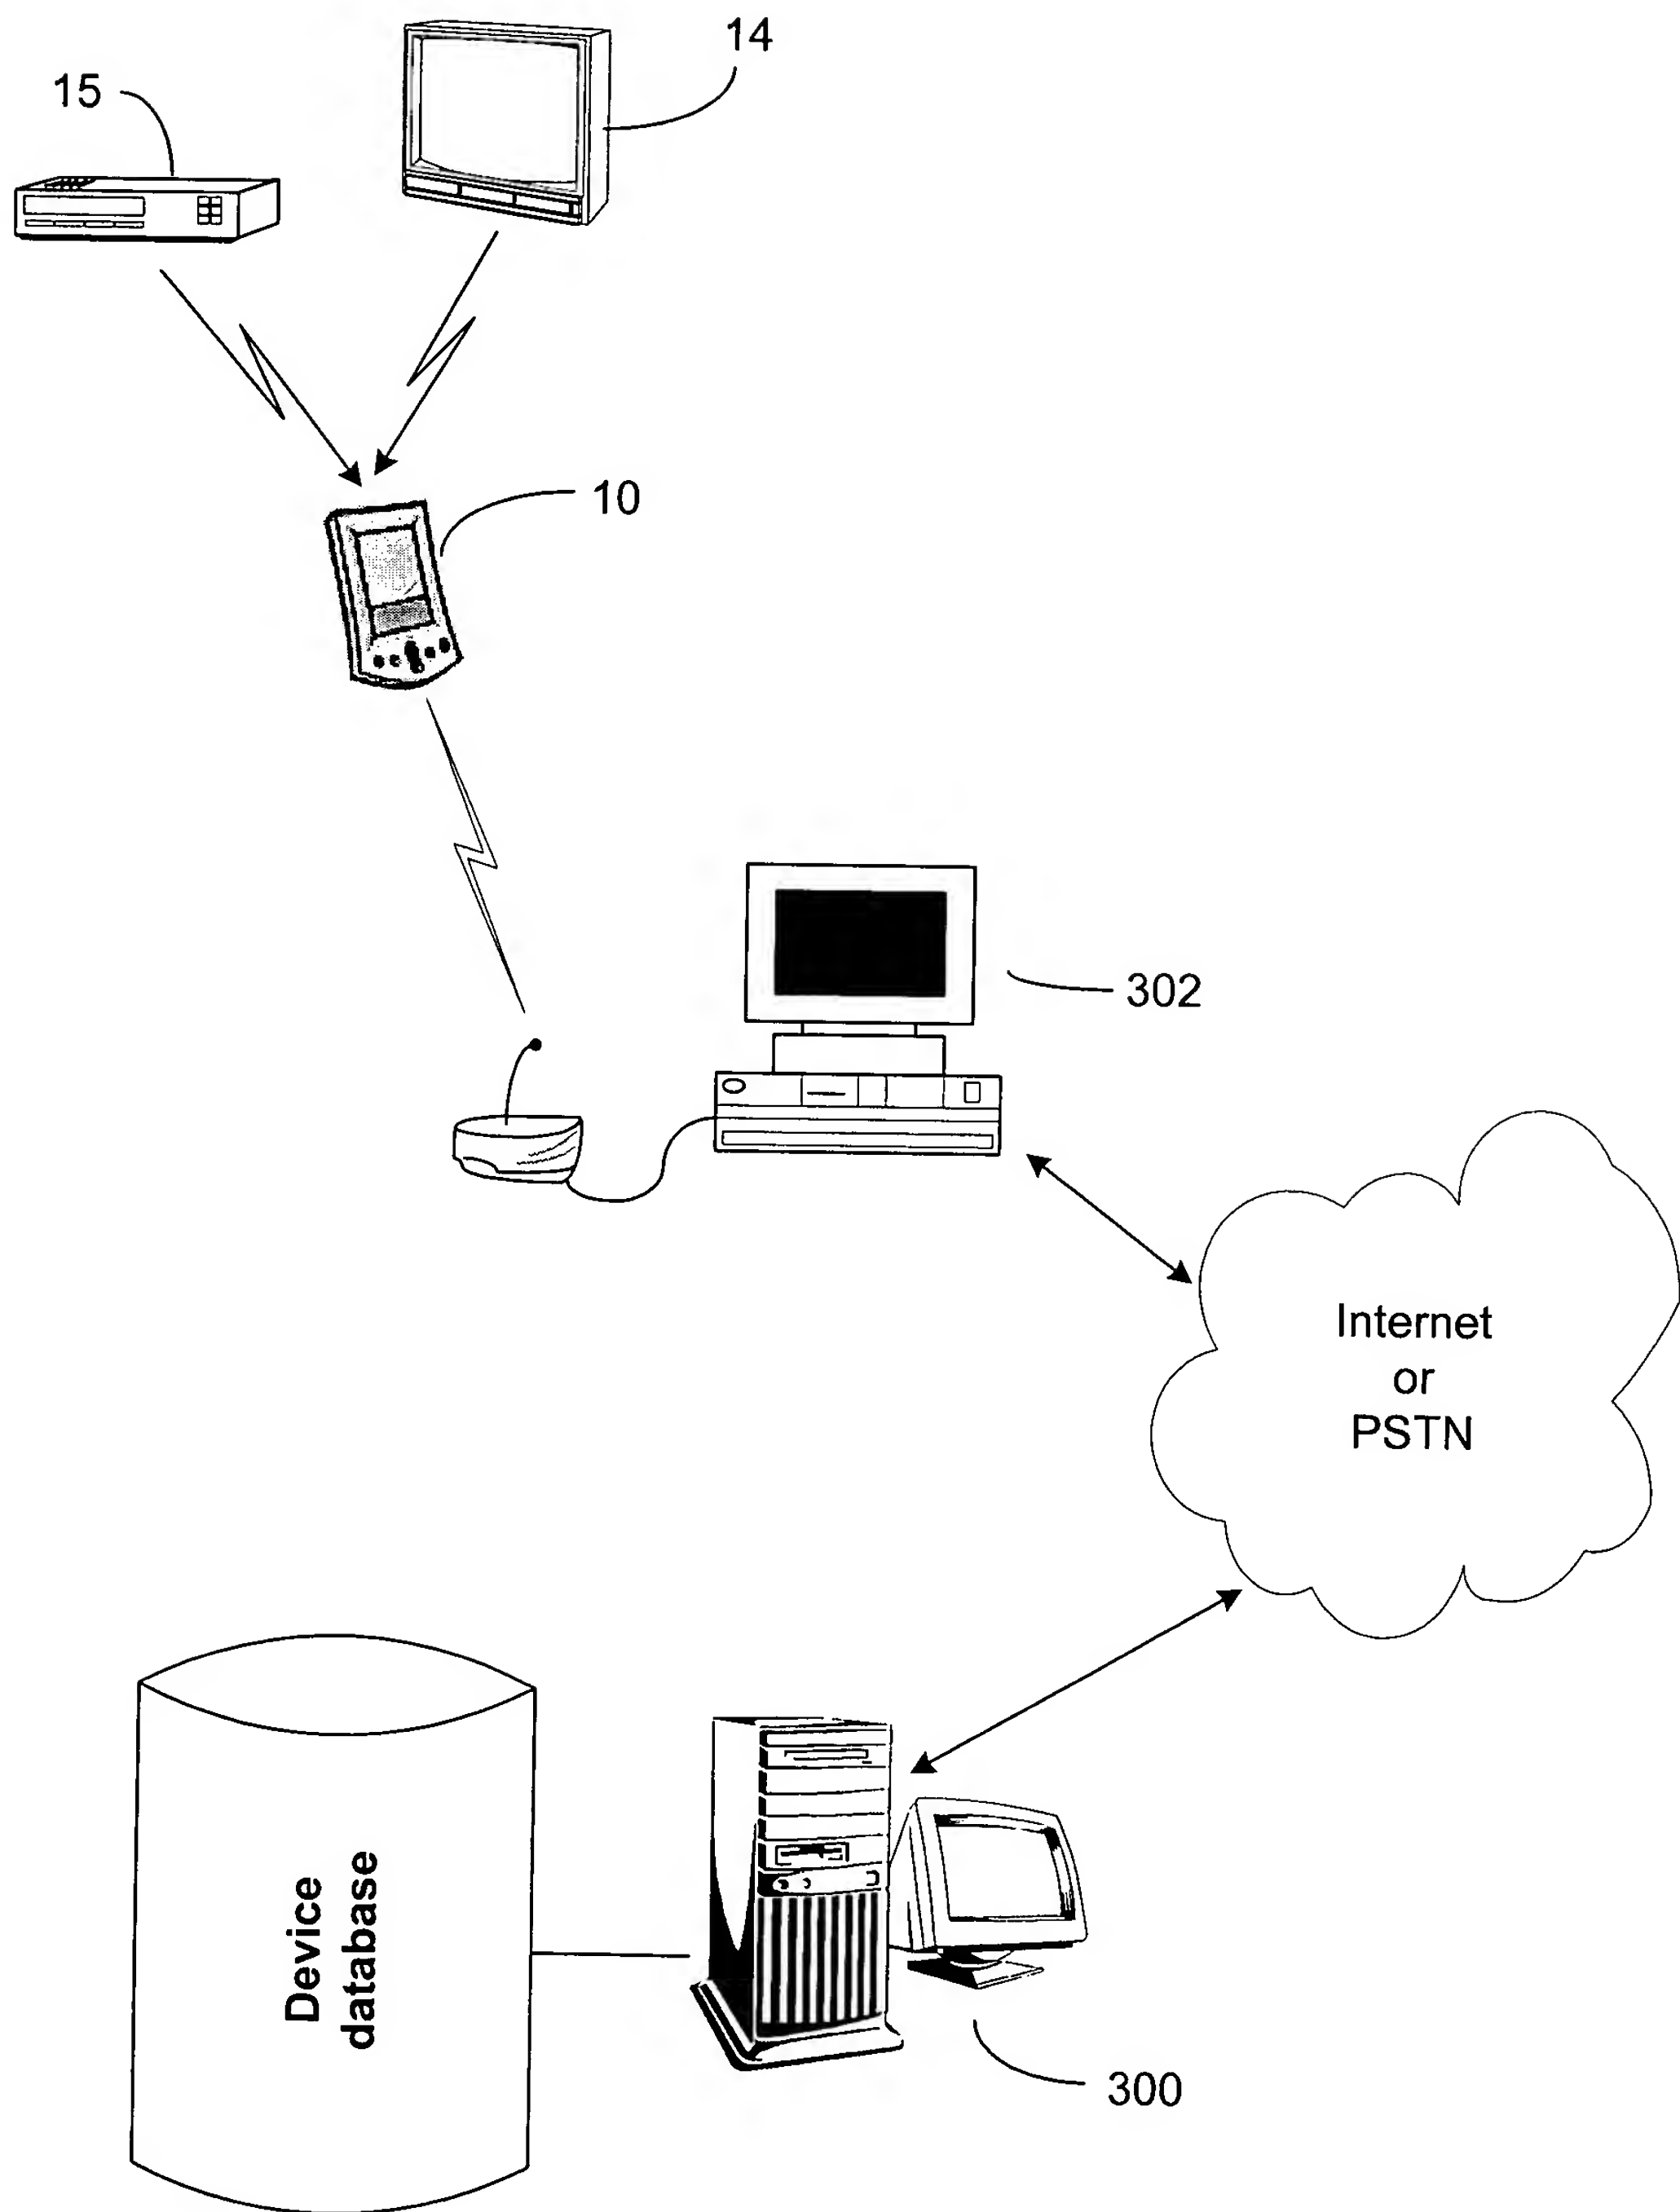


Figure 15

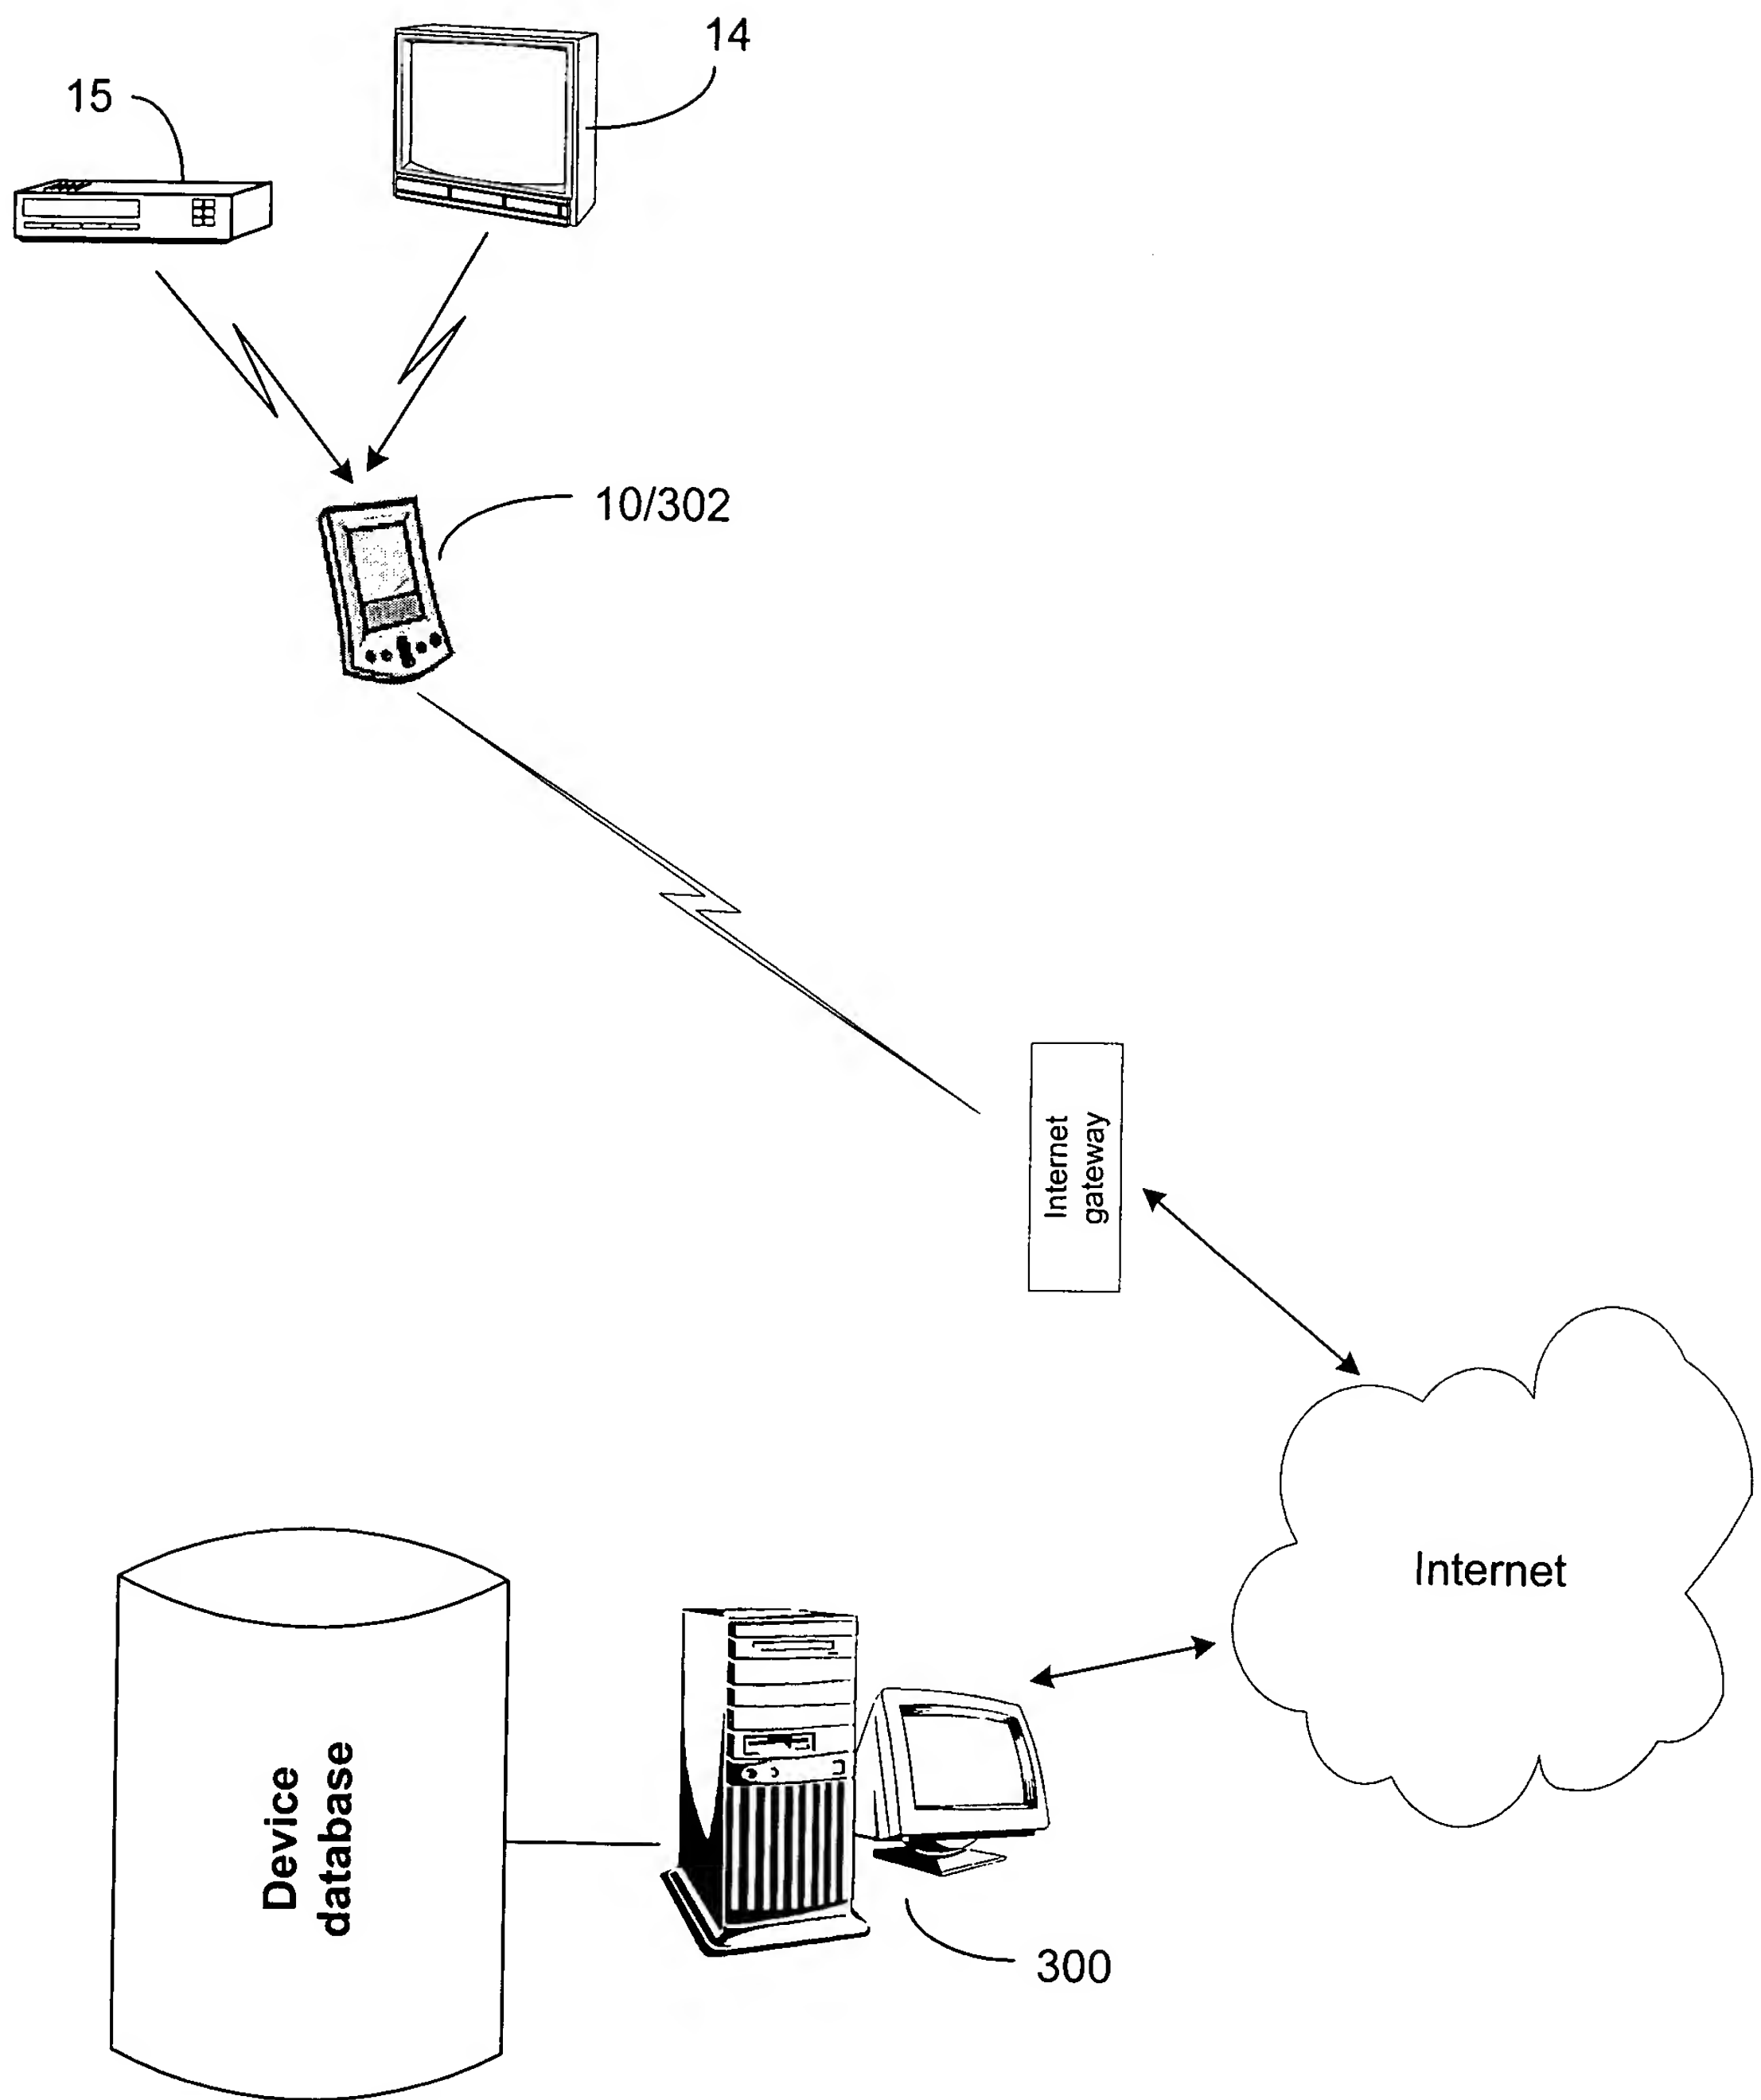


Figure 16

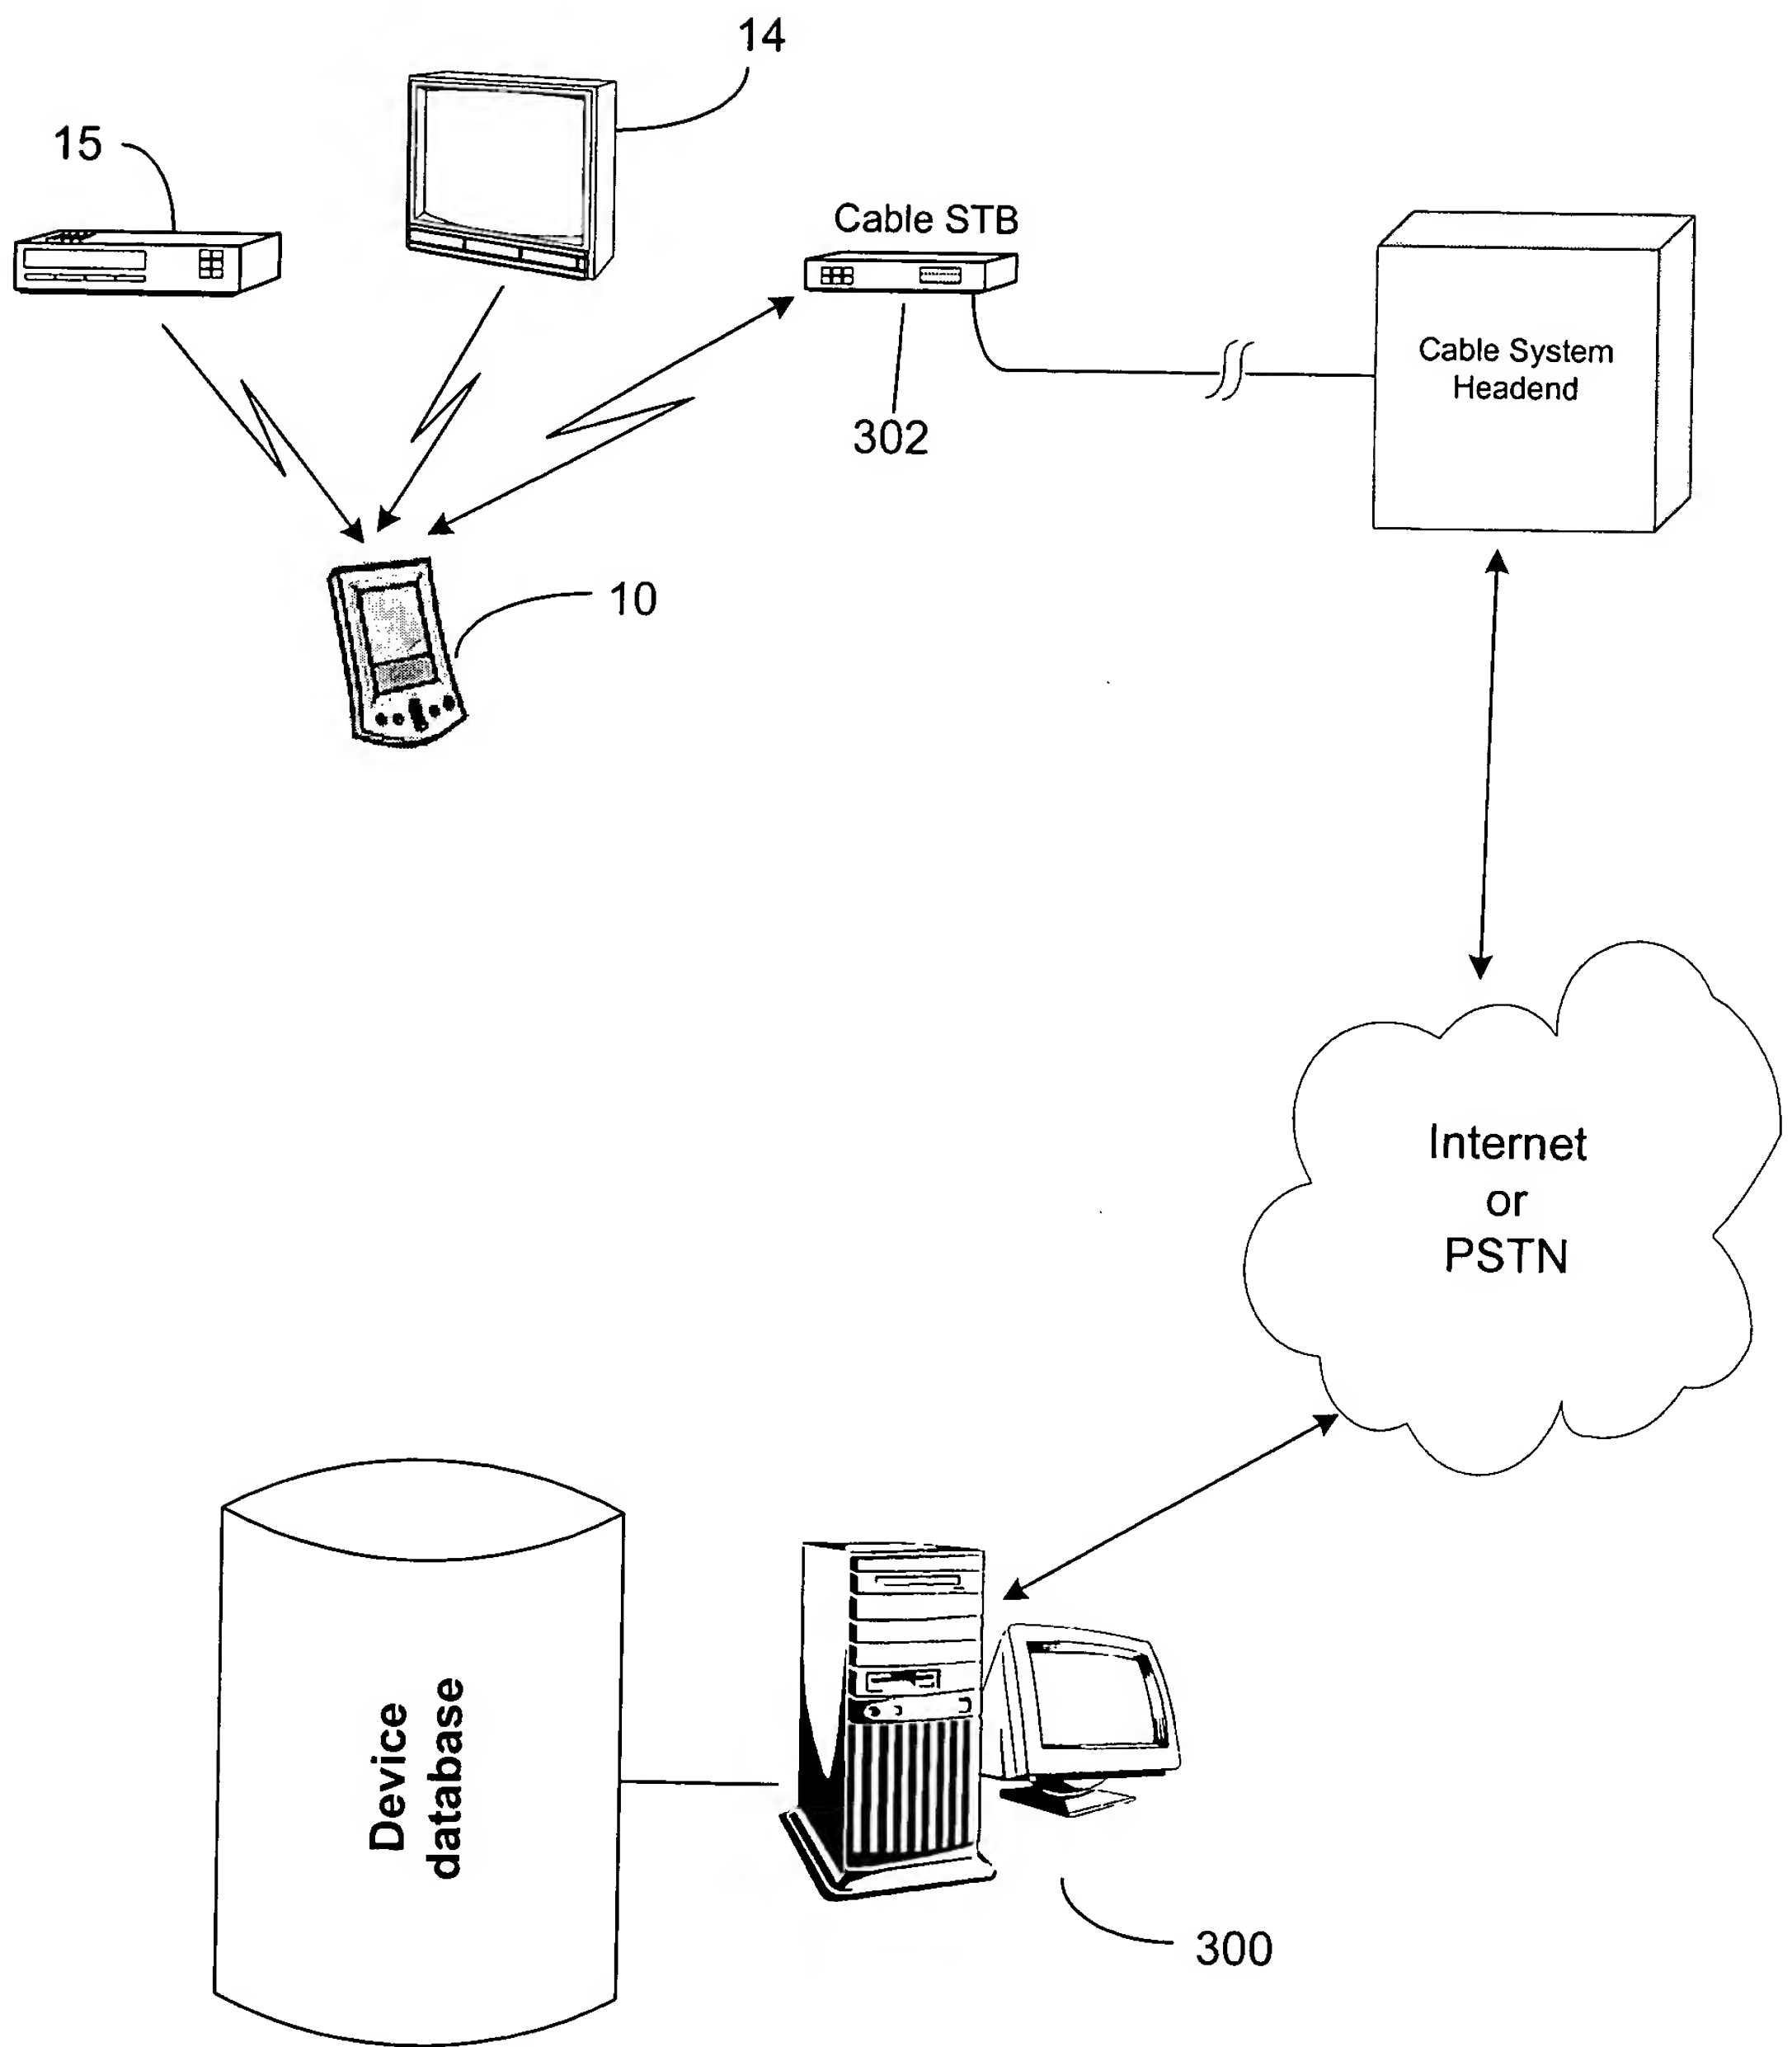


Figure 17

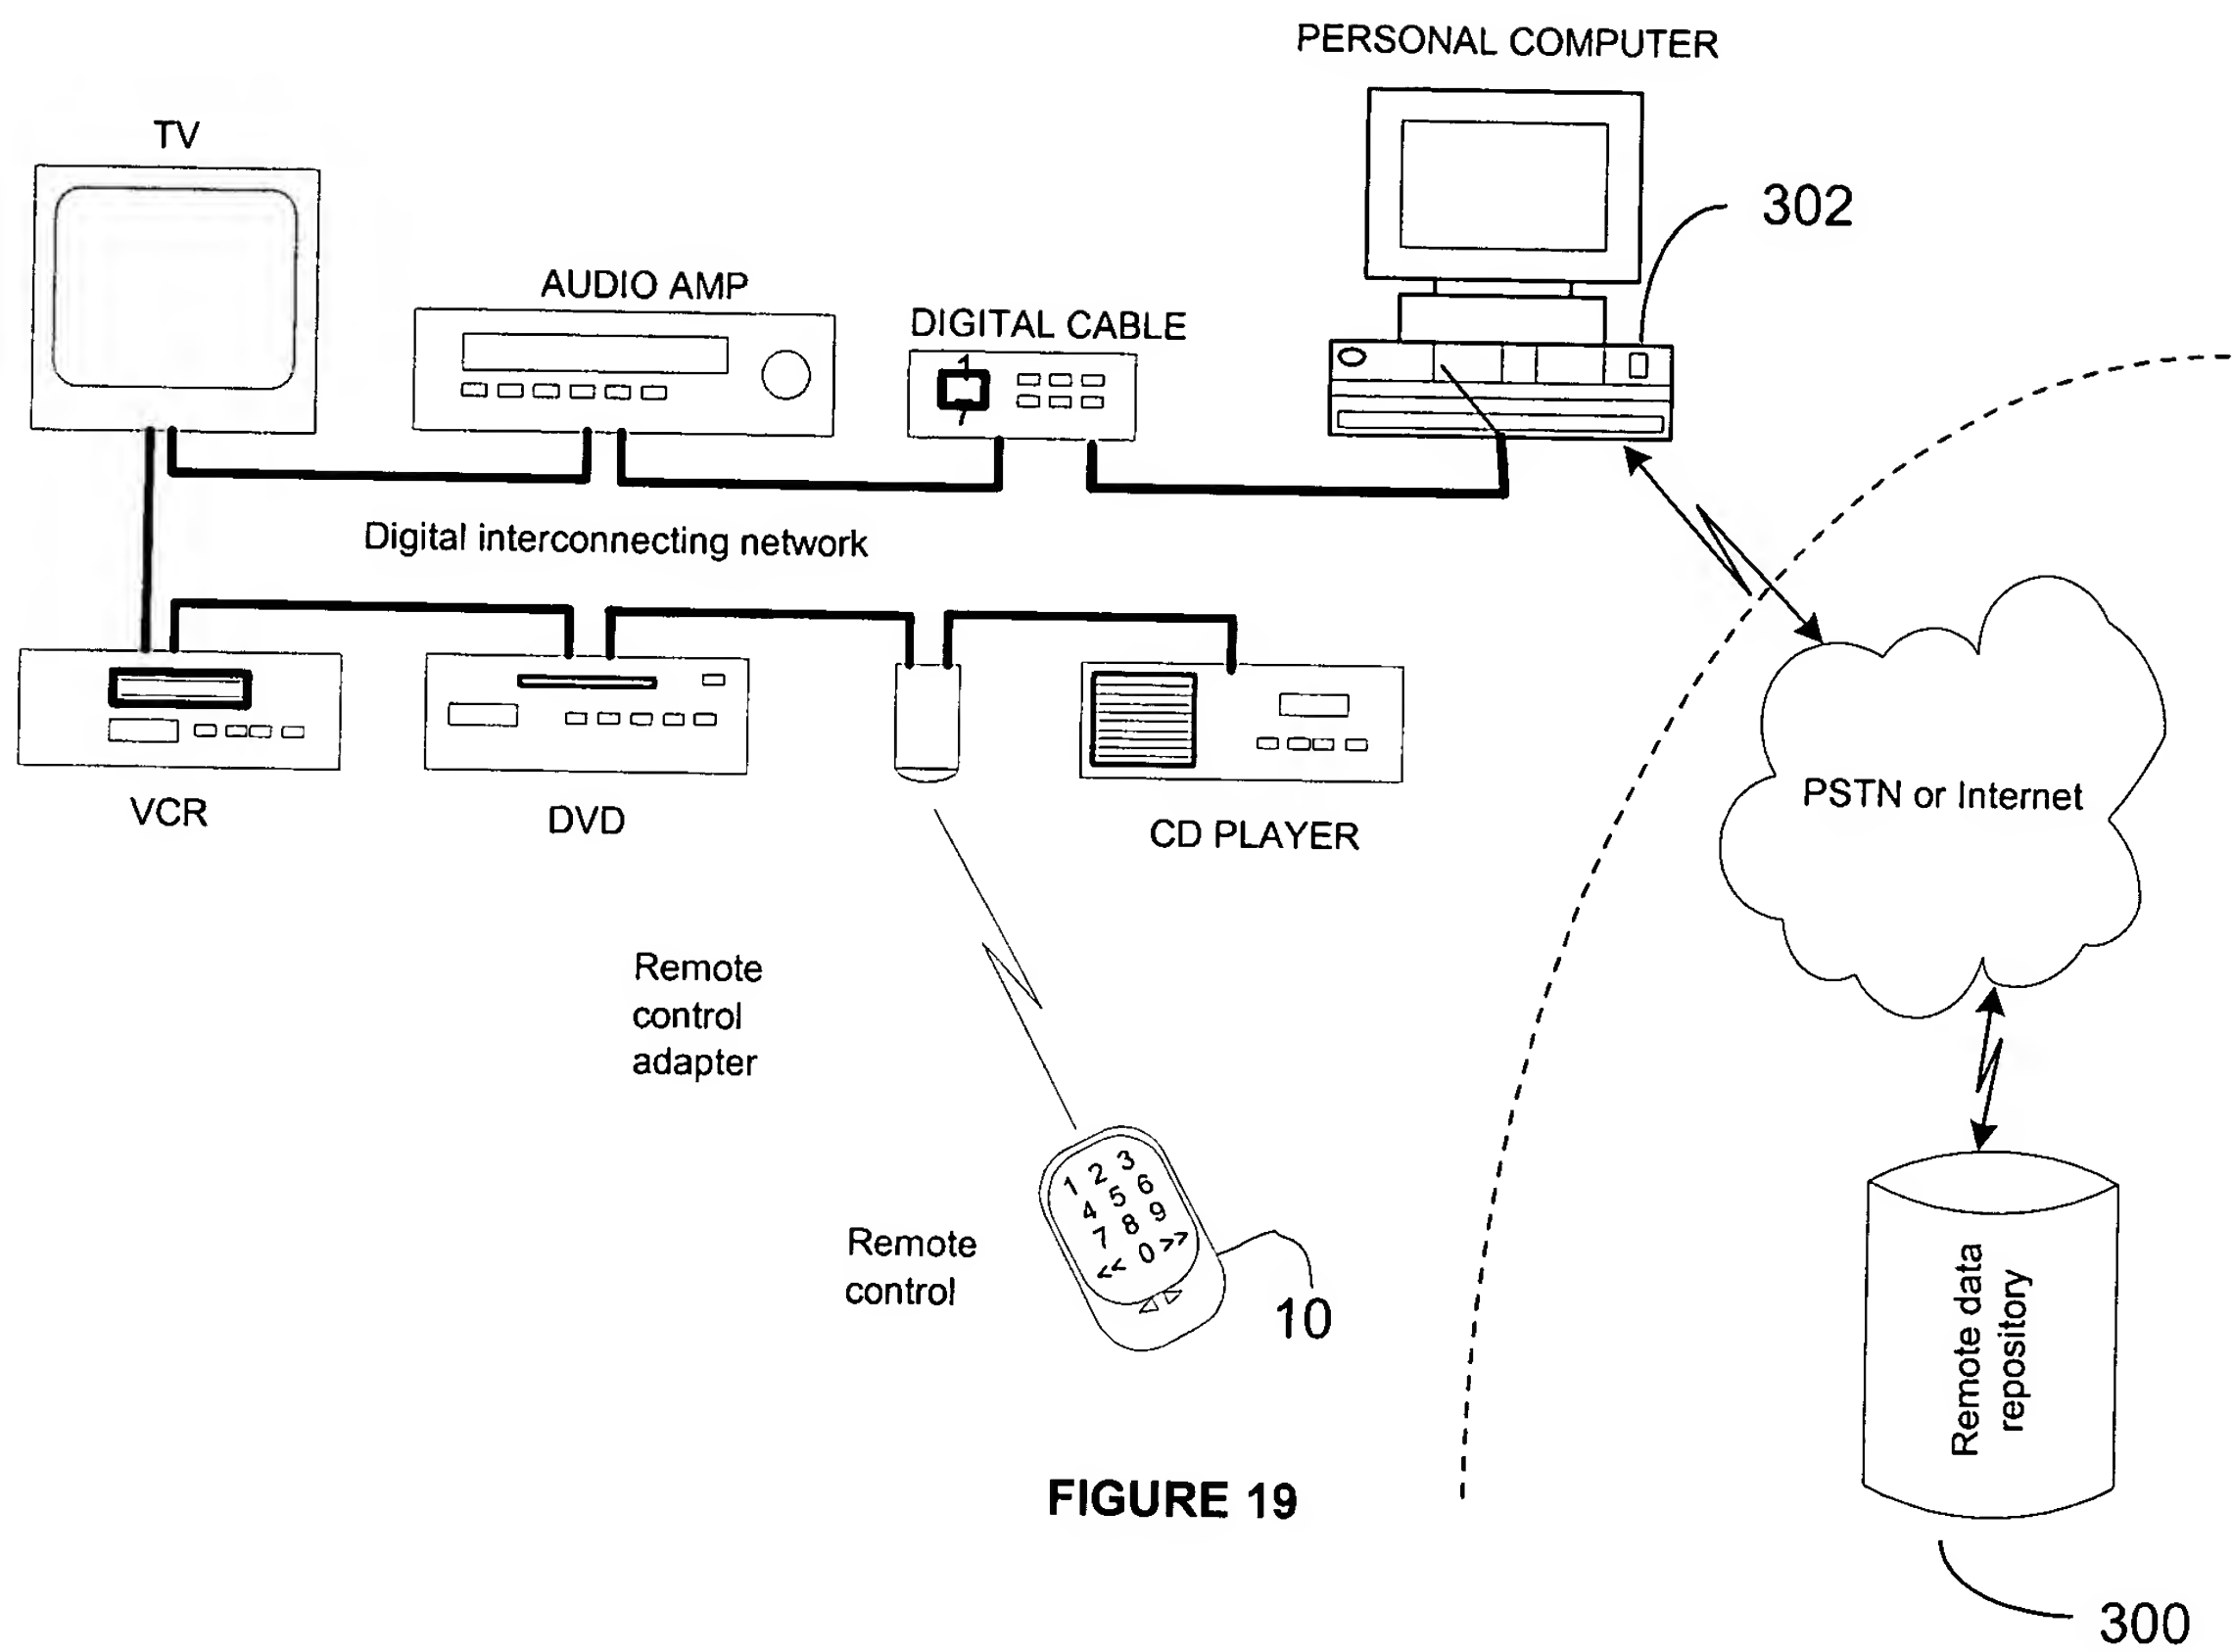


Figure 18

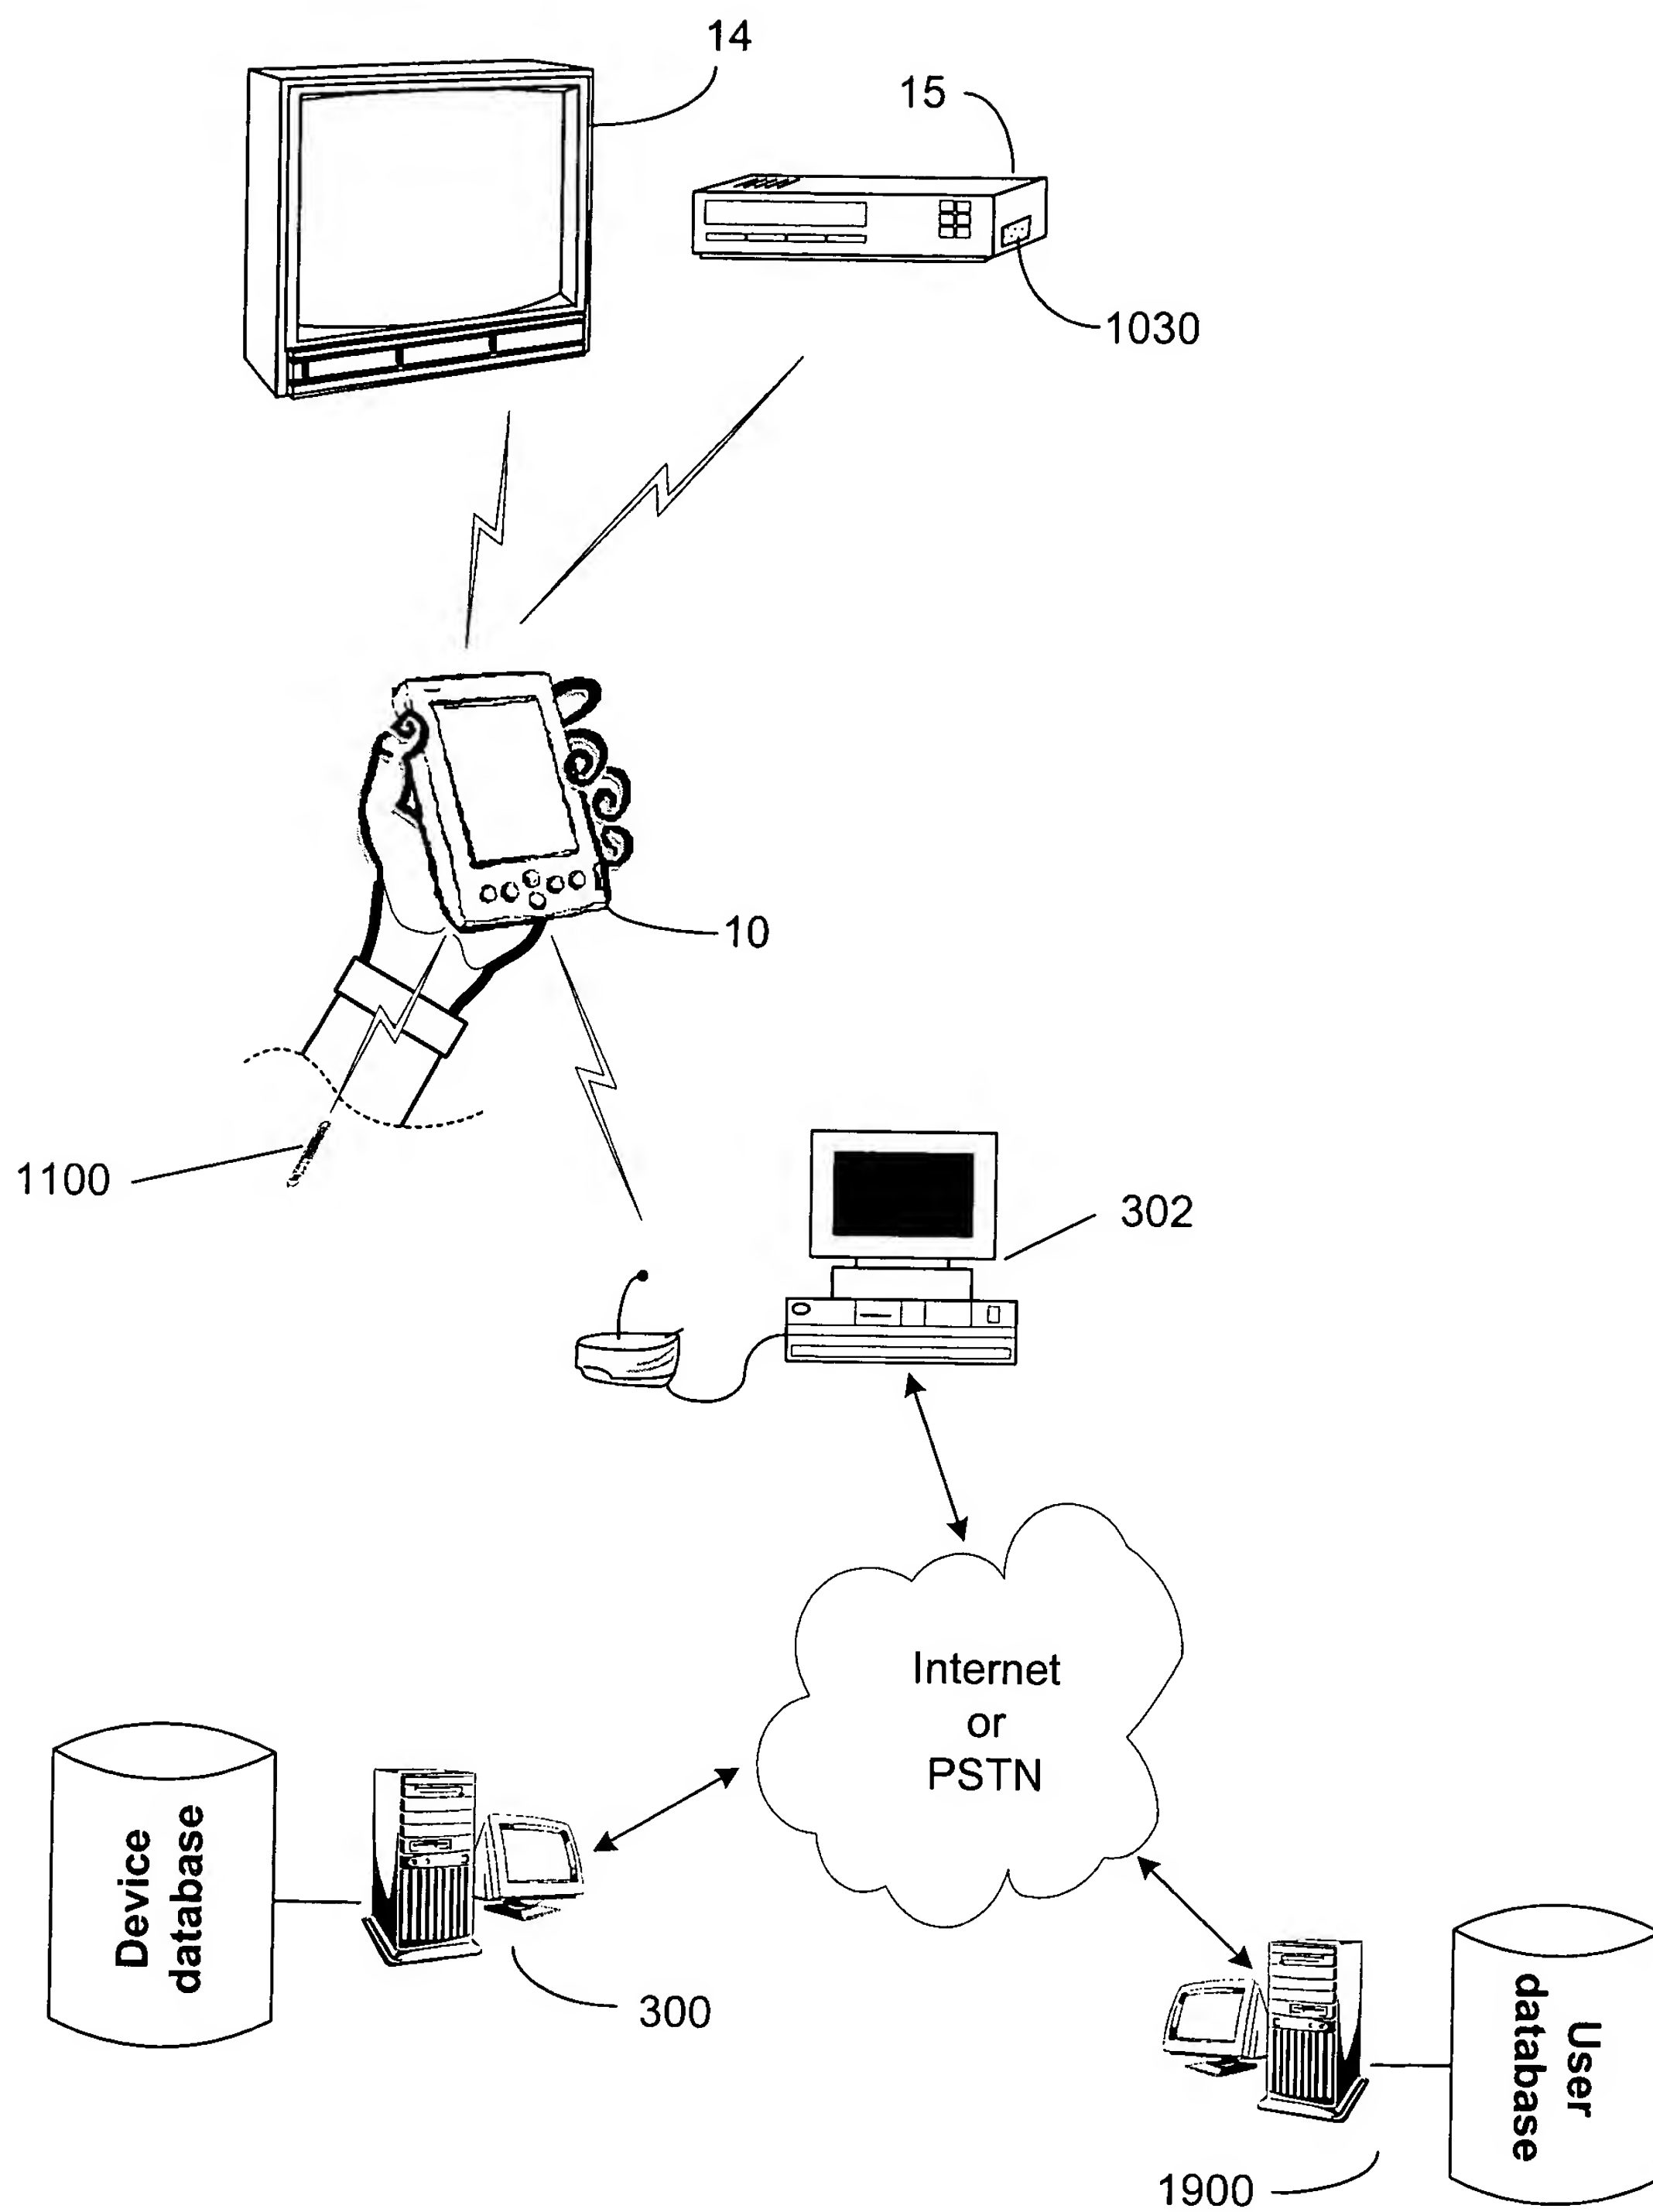


Figure 19

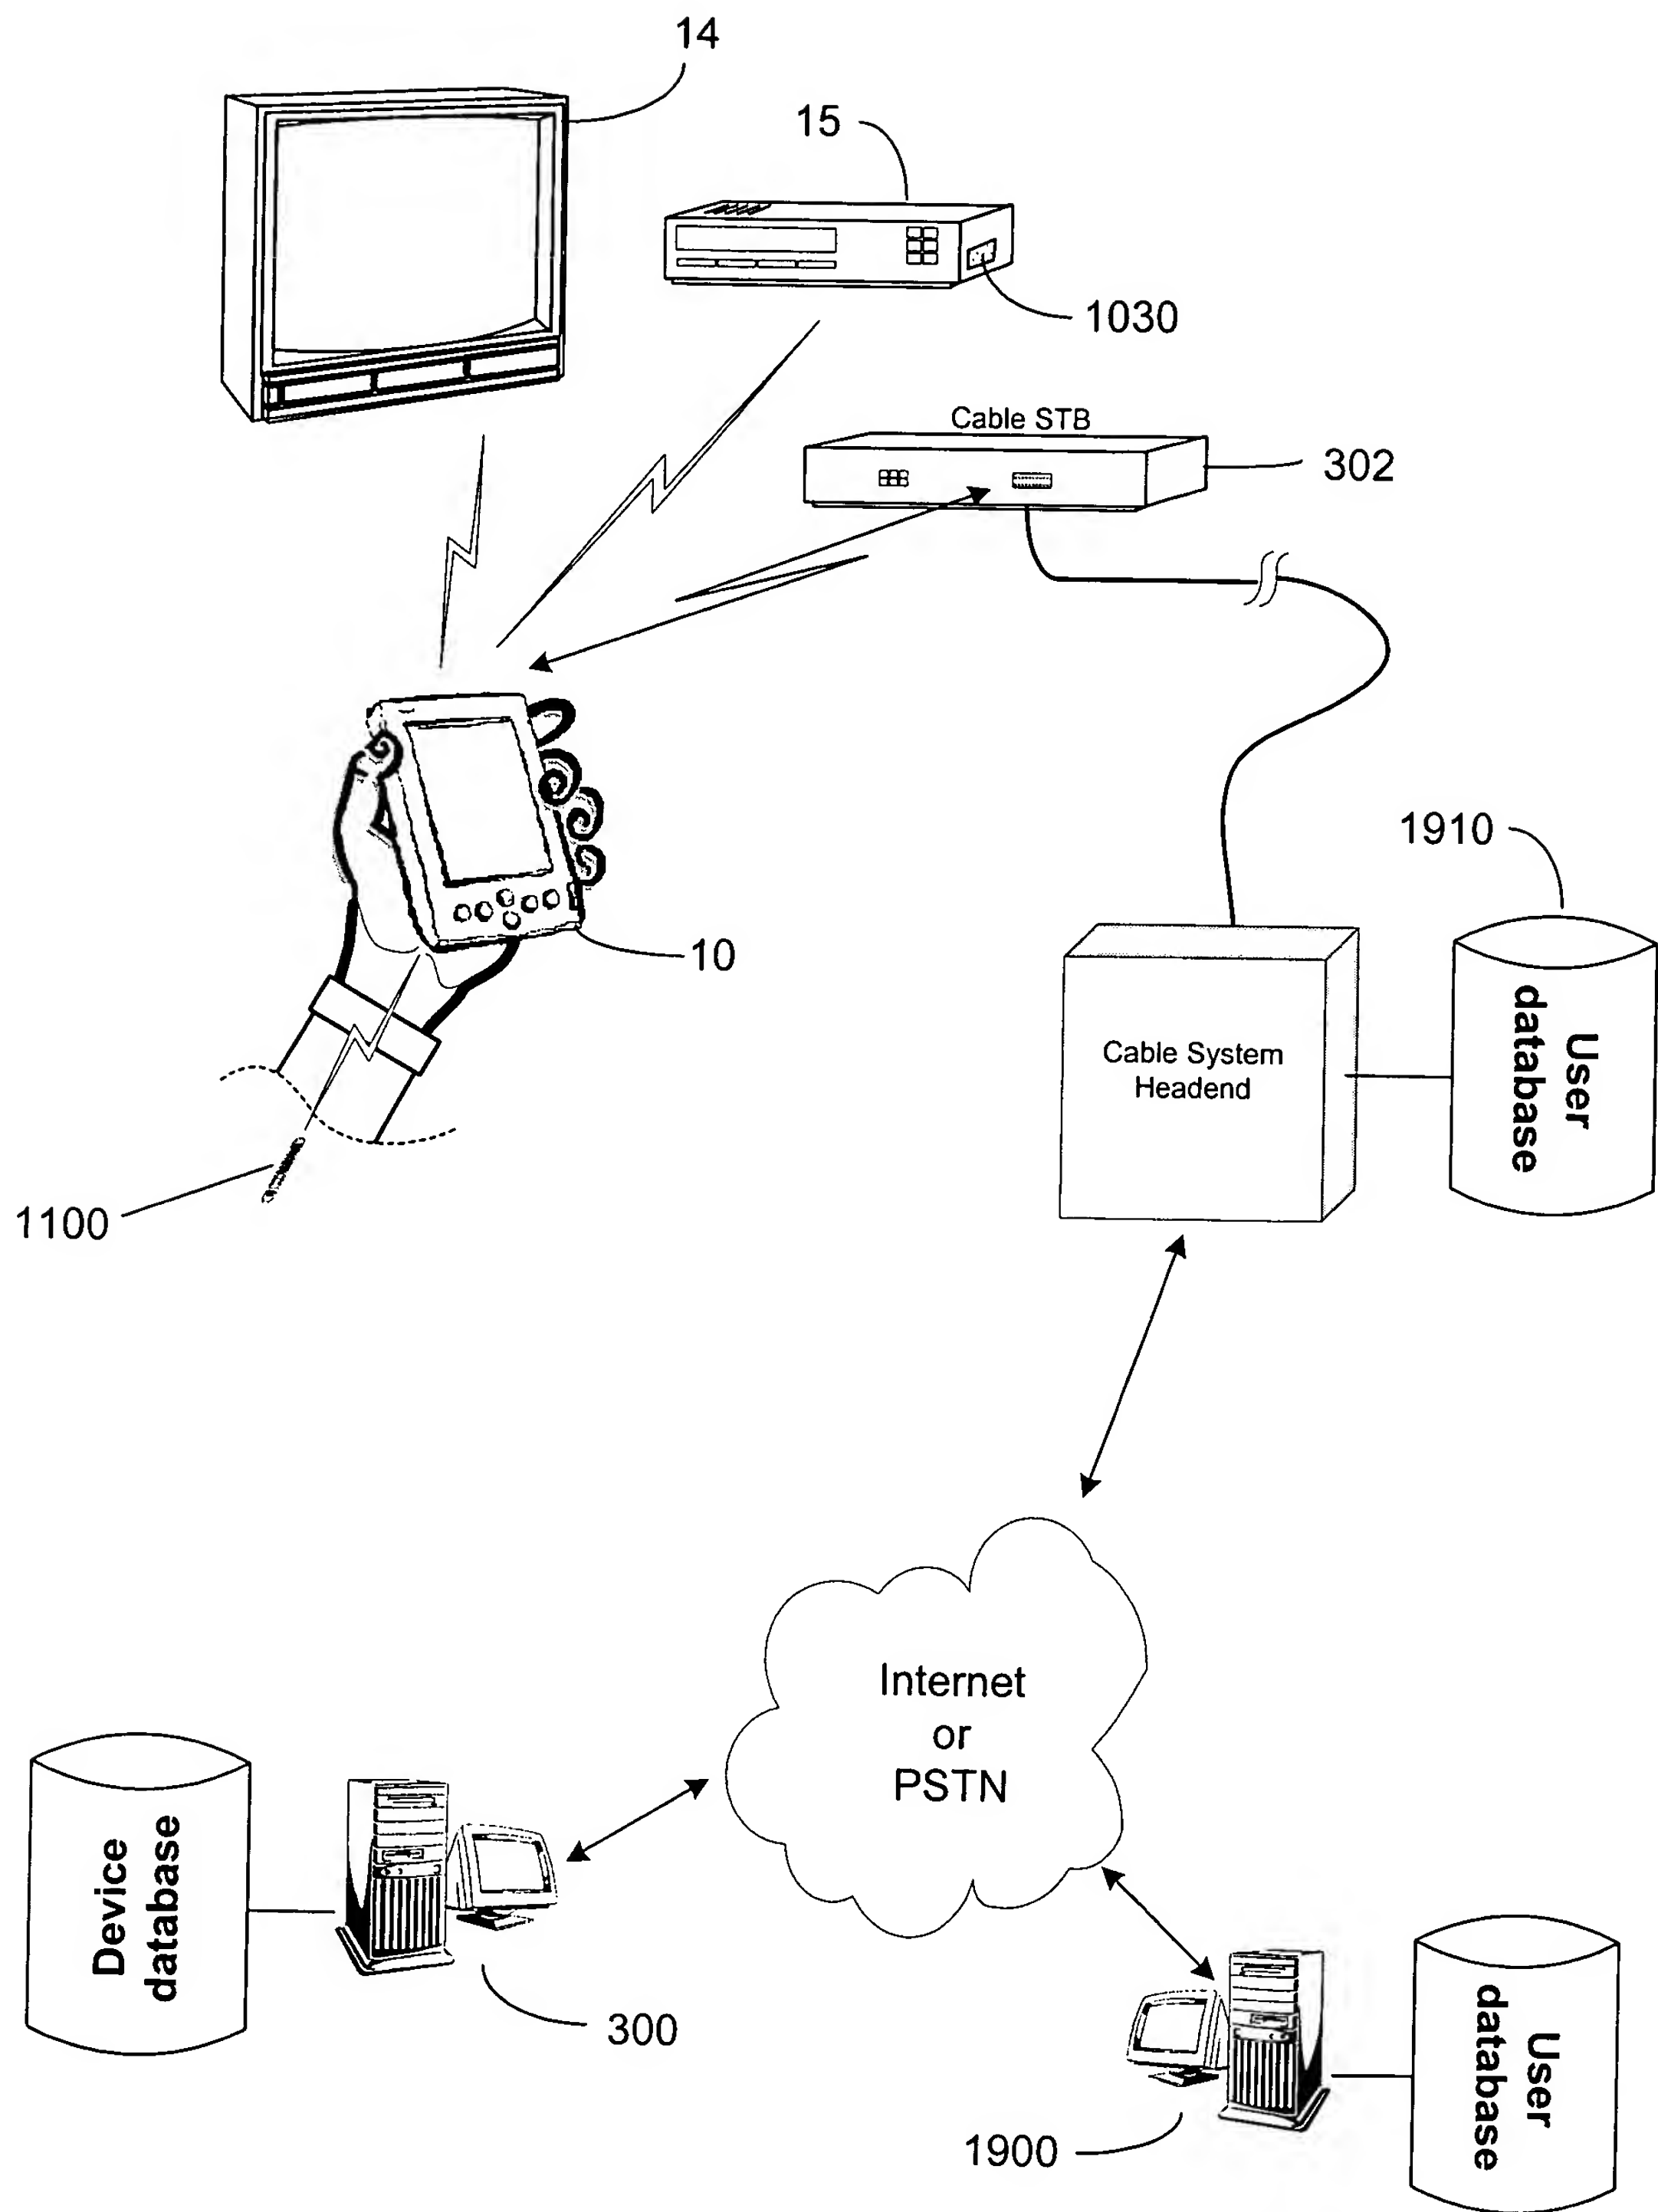


Figure 20